

10/526915
Rec'd T/PTO 07 MAR 2005

#2

REC'D 20 OCT 2003

WIPO

PCT

P1 1078131

THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office

October 15, 2003

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM
THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK
OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT
APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A
FILING DATE.

APPLICATION NUMBER: 60/408,427

FILING DATE: September 05, 2002

RELATED PCT APPLICATION NUMBER: PCT/US03/27995



By Authority of the
COMMISSIONER OF PATENTS AND TRADEMARKS

W. Montgomery
W. MONTGOMERY
Certifying Officer

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

09-06-02 611408427 090502
A/PR 0VJC698 U.S. PTO
09/05/02

PROVISIONAL APPLICATION COVER SHEET


This is a request for filing a PROVISIONAL APPLICATION under 37 CFR 1.53(b)(2).

JC679 U.S. PTO
60/408427
09/05/02

Docket Number				TH-2244 (US)		Type a plus sign (+) inside this box	
INVENTOR(S)/APPLICANT(S)							
LAST NAME	FIRST NAME	MIDDLE INITIAL	RESIDENCE (CITY AND EITHER STATE OR FOREIGN COUNTRY)				
Matzakos	Andreas	N.	2115 Parkview Lane, Missouri City, Texas 77459				
Wellington	Scott	L.	Houston, Texas				
Clomburg	Lloyd	A.	Houston, Texas				
Veenstra	Peter		Houston, Texas				
Munshi	Abdul	W.	Houston, Texas				
Jean	Rong	H	Houston, Texas				
Elliott	Glenn	W.	Houston, Texas				
TITLE OF THE INVENTION (280 characters max)							
FLAMELESS DISTRIBUTED COMBUSTION HEATED, MEMBRANE, STEAM REFORMING REACTOR FOR PRODUCTION OF HIGH PURITY HYDROGEN							
CORRESPONDENCE ADDRESS							
SHELL OIL COMPANY P. O. BOX 2463 HOUSTON, TEXAS							
STATE	Texas	ZIP CODE	77252-2463	COUNTRY	United States		
ENCLOSED APPLICATION PARTS (check all that apply)							
<input checked="" type="checkbox"/> Specification <i>Number of Pages</i> <u>86</u> <input type="checkbox"/> Small Entity Statement							
<input checked="" type="checkbox"/> Drawing(s) <i>Number of Sheets</i> <u>14</u> <input type="checkbox"/> Other (specify)							
METHOD OF PAYMENT OF FILING FEES FOR THIS PROVISIONAL APPLICATION FOR PATENT (check one)							
<input type="checkbox"/> A check or money order is enclosed to cover the Provisional filing fees						FILING FEE AMOUNT(S)	\$160
<input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge filing fees and credit Deposit Account Number <u>19-1800</u>							

Respectfully submitted,

SIGNATURE

Date September 5, 2002TYPED or PRINTED NAME Y. Grace TsangREGISTRATION NO. 31,672

PROVISIONAL APPLICATION FILING ONLY

TH2244 (US)
LPM/YGT:SWT

5

FLAMELESS DISTRIBUTED COMBUSTION HEATED, MEMBRANE, STEAM
REFORMING REACTOR FOR PRODUCTION OF HIGH PURITY HYDROGEN

FIELD OF THE INVENTION

10 [0001] This invention relates to a process and appara-
tus for the production of pure hydrogen by steam reform-
ing, and to the use of the hydrogen in a zero emission
hybrid power system incorporating a fuel cell. The proc-
ess integrates the steam reforming and shift reaction to
15 produce pure hydrogen with minimal production of CO and
virtually no CO in the hydrogen stream, provides for CO₂
capture for sequestration, employs a steam reforming mem-
brane reactor, and is powered by flameless distributed
combustion that provides great improvements in heat ex-
20 change efficiency.

BACKGROUND OF THE INVENTION

[0002] The production of electrical power in the most
efficient manner with minimization of waste is the focus
25 of much research. It would be desirable to improve effi-
ciency in the production of electricity, separate and use
by-product CO₂ in other processes, and produce minimal
NO_x. The wide availability of natural gas with the high-
est H:C ratio (4:1) of any fossil fuel makes it a prime

candidate for electricity production with minimum CO₂ emissions.

[0003] In the production of electricity by conventional means only about 35% of the hydrocarbon fuel is converted to electricity and approximately 5% of that is lost over power lines. Even with modern turbines the efficiency is about 45%. In the case of the additional production of electricity by a "bottom cycle" where high temperature exhaust is used to boil water and produce more electricity, the combined efficiency is only about 60% in the lab. In addition, though about 3-5% CO₂ is produced as exhaust from turbines, it is very difficult and expensive to capture due to the low concentration in the exhaust streams.

[0004] Electricity can be produced in fuel cells using pure hydrogen. Hydrogen production is commercially proven, but expensive. One method of producing hydrogen is steam methane reforming where hydrocarbons and water are reacted to form CO and H₂, followed by a separate water-gas-shift reaction where CO is reacted with H₂O to form CO₂ and H₂. The commercial application of these reactions in many refineries commonly involves a series of reactors including a steam reforming reactor, and several post reactors to address the production of CO in the reformer. The post reactors include a high temperature shift reactor, a low temperature shift reactor, and a CO₂

absorber separator. Water and CO₂ separation is necessary to achieve pure hydrogen. The reforming reactor is run at high pressure to avoid hydrogen recompression downstream. The pressure lowers the equilibrium conversion
5 since reforming produces a positive net mole change. The steam reforming reaction is very endothermic, about 206 kJ/mole; and the shift reaction is exothermic, providing about 41 kJ/mole. The conventional steam reforming reactors are operated above 900°C to push the equilibrium to-
10 ward complete formation of CO and H₂. The high temperature causes severe corrosion and stress problems on the equipment. Steam reforming reactors are generally large to accomplish economies of scale. In addition, the typical operation of the shift reactor at a lower temperature
15 than the reforming reactor makes it impractical to combine these two chemical reactions in one reactor. Furthermore, designs currently known do not lend themselves to being scaled down to a smaller size or to making it possible to efficiently control the temperature at vari-
20 ous points.

[0005] Even if a reactor was capable of producing only CO₂ and H₂ and the conventional post reactors could be eliminated, the issue of CO₂ separation would remain.

[0006] In experimental work the use of membranes to
25 harvest hydrogen from a reforming process is known. For example, U. S. 4,810,485 discloses a hydrogen forming

process which comprises conducting in a hydrogen production zone a chemical reaction forming mixed gases including molecular hydrogen, contacting one side of a hydrogen ion porous and molecular gas nonporous metallic foil with
5 said mixed gases in said hydrogen production zone, dissociating said molecular hydrogen to ionic hydrogen on said one side of said metallic foil, passing said ionic hydrogen through said metallic foil to its other side, and withdrawing hydrogen from said other side of said metallic foil, thereby removing hydrogen from said hydrogen
10 production zone. This process takes place at a temperature of from about 1000°F to 1400°F.

[0007] U.S. 5,525,322 discloses a process for the simultaneous recovery of hydrogen and hydrogen isotopes
15 from water and from hydrocarbons which comprises mixing carbon monoxide and water with the feed mixture forming a gas mixture such that the reversible reactions $\text{CO} + \text{H}_2\text{O} \leftrightarrow \text{CO}_2 + \text{H}_2$ and $\text{CH}_4 + \text{H}_2\text{O} \leftrightarrow \text{CO} + 3\text{H}_2$ can occur, flowing the gas mixture over a heated nickel catalyst such that
20 the equilibrium of the reactions permits subsequent generation of H isotopes, contacting the resulting gas mixture with a heated palladium membrane, and removing the H isotopes which have permeated the Pd membrane. The reactor is heated by enclosing it in a split-hinge tube furnace.
25

[0008] U.S. 5,741,474 discloses a process for producing high-purity hydrogen which includes heating a reforming chamber provided with a hydrogen-separating membrane, feeding into the reforming chamber hydrocarbon, steam, and oxygen or air to give rise to steam reforming and partial oxidation therein to produce a reaction gas, and passing the reaction gas through the hydrogen-separating membrane to recover high-purity hydrogen. The heat possessed by the portion of the reaction gas not permeable into the hydrogen-separating membrane and the heat generated by the partial oxidation are utilized for the heating and reforming of the hydrocarbon, water and oxygen or air.

[0009] U.S. 5,861,137 discloses a compact, mobile steam reformer that includes a tubular hydrogen-permeable and hydrogen selective membrane. A reforming bed surrounds at least part of the membrane. An inlet to the reforming bed receives a mixture of alcohol or hydrocarbon vapor and steam and an outlet from the reforming bed releases reforming byproduct gases. A heating element heats the reforming bed to an operating temperature and a second bed including a methanation catalyst is placed at the permeate side of the membrane. A reformer outlet withdraws hydrogen gas from the second bed. In one aspect, the heating element is a third bed including an oxidation catalyst surrounding at least a portion of the

first bed. The reforming by-product gases released from the reforming bed mix with an air source and catalytically ignite to generate heat and thermally support the process of reforming within the reforming bed.

- 5 [0010] U. S. 5,229,102 discloses a steam reforming process that does not require a shift reactor. It requires a gas turbine to produce hot exhaust gases. That reference discloses a process employing the steps of: a) providing a generally tubular, porous, ceramic membrane, 10 and providing a heated reaction zone in a container into which the membrane is received, b) wherein the membrane carries a catalytically active metallic substance, c) passing a hydrocarbon and steam containing first fluid stream into the reaction zone and into contact with one 15 side of the membrane to produce CO_2 and H_2 , d) and passing a steam containing second fluid stream adjacent the opposite side of the membrane in such manner as to promote hydrogen diffusion through the membrane from said one side to said opposite side thereof, e) and removing hy- 20 drogen from the opposite side of the membrane. This process takes place at lower temperatures than are typical of conventional reforming, i.e. 300-750°C, however it requires a gas turbine or gas engine to produce hot exhaust gas and the generated heat is transferred into the reac- 25 tion zone to maintain the temperature.

[0011] U.S. 5,938,800 discloses a compact hydrogen generation system that comprises a fuel means for supplying a pressurized, vaporized fuel and steam mixture, a steam reformer having a catalyst bed in communication
5 with the fuel means, and hydrogen filtration means for filtering and removing hydrogen produced in the catalyst bed from the fuel and steam mixture and means for providing same to a collection header, and burner means integrated with the steam reformer for providing hot flue
10 gases to heat the catalyst bed and to make the vaporized fuel and steam mixture by combustion of a least one of an off-gas produced by the steam reformer and an auxiliary fuel, whereby the steam reformer, fuel means and burner means are mobile and lightweight.

15 [0012] U.S. 6,207,132 discloses an apparatus for producing hydrogen including a reforming chamber containing a reforming catalyst bed, a hydrogen-permeable membrane disposed in the reforming chamber and an oxidation chamber containing an oxidation catalyst bed for burning gas
20 not permeable to the membrane tube whereby heat is supplied to the reforming chamber.

[0013] It would be desirable in the art to provide a steam reformer reactor design for producing hydrogen completely free of carbon and carbon oxides and with minimal
25 production of NO_x . If the pure hydrogen produced could be used to create power in a hybrid system that could be

compact in design and provide 71% or greater efficiency in the production of energy it would represent a distinct advance in the art. In addition, it would be desirable if lower temperatures could be used and if the entire
5 process permitted more control over temperatures at various points, or load-following capabilities. Furthermore, if the process produced CO₂ in higher concentrations and greater purity than other processes in the art, and the CO₂ could be sequestered for other uses, it would be ex-
10 tremely desirable. Such an integrated system would demonstrate far greater efficiency than any power generating system currently available.

SUMMARY

15 [0014] In accordance with the foregoing, the present invention provides a new process and apparatus for steam reforming of any vaporizable hydrocarbon to produce H₂, and CO₂, with minimal CO, and virtually no CO in the H₂ stream, said process being accomplished in one reactor,
20 at lower temperatures than those used in conventional steam methane reforming reactors, constantly removing pure hydrogen, and using as a heat source flameless distributed combustion which provides great improvements in heat exchange efficiency and load-following capabilities
25 to drive the steam reforming reaction. Similar efficiency and load-following is simply not possible with

conventional firebox steam- reformer furnace designs and multi-reactor shift units. The flameless distributed combustion heat source makes it possible to transfer between 90 and 95% of the heat to the reacting fluids. In another embodiment, the invention is also a zero emission hybrid power system wherein the produced hydrogen is used to power a high-pressure internally or externally manifolded molten carbonate fuel cell. The system is capable of achieving 71% or greater efficiency in the conversion of fuel to electricity. In addition, the design of this flameless distributed combustion - membrane steam reforming reactor (FDC-MSR) fueled hybrid system makes it possible to capture high concentrations of CO₂ for sequestration or use in other processes. Finally, the design of the system can be scaled down to a mobile, lightweight unit.

[0015] The process for steam reforming of any vaporizable hydrocarbon to produce purified H₂ and CO₂ comprises:

- a) Providing a generally tubular reforming chamber having one or more inlets for vaporizable hydrocarbons and steam and one or more corresponding outlets for by-product gases, including H₂O and CO₂, with a flow path in between said inlet and outlet, and having one or more inlets for sweep gas (which may be H₂O in the form of steam, or other gas such as recycled CO₂, nitrogen or condensable hydrocarbons) and correspond-

- ing outlets for the sweep gas and hydrogen, with a flow path between said inlet and outlet, and having one or more inlets for preheated air and corresponding inlets for fuel gas mixtures, with a flow path
- 5 between said inlets containing a plurality of flameless distributed combustion heaters, wherein said flow path for vaporizable hydrocarbon and flow path for sweep gas form two concentric sections with an annulus between having a reforming catalyst therein;
- 10 b) Feeding a vaporizable hydrocarbon and steam into said reforming chamber through said inlet for a vaporizable hydrocarbon and steam;
- c) Flowing said vaporizable hydrocarbon over a reforming catalyst;
- 15 d) Causing both steam reforming and the shift reaction to take place in said reforming chamber; and
- e) Conducting said reforming in the vicinity of a hydrogen-permeable and hydrogen-selective membrane, whereby pure hydrogen permeates said membrane;
- 20 f) Wherein heat to drive said reaction is provided by said flameless distributed combustors.

[0016] The process of the present invention may also be described as a process for the production of hydrogen, comprising:

- 25 a) reacting steam with a vaporizable hydrocarbon at a temperature of from about 200°C to about 700°C and

at a pressure of from about 1 bar to about 200 bar
in a reaction zone containing reforming catalyst
to produce a mixture of primarily hydrogen and
carbon dioxide, with a lesser amount of carbon
5 monoxide;

- b) providing heat to said reaction zone by employing
one or more flameless distributed combustion cham-
bers (which may in the form of a tube or other
shape) thereby driving said reaction;
- 10 c) conducting said reaction in the vicinity of one or
more hydrogen-permeable and hydrogen-selective
membranes, whereby hydrogen formed in said reac-
tion zone permeates through said selective mem-
brane(s) and is separated from said carbon dioxide
15 and carbon monoxide.

[0017] In order to produce electricity with zero emis-
sions and capture CO₂, the pure hydrogen which permeates
the membrane may be directed to the anode of a high
pressure molten carbonate fuel cell and the by-products
20 from the reforming reaction are directed to the cathode
of said fuel cell. The high purity hydrogen can also be
directed to other types of fuel cells, such as PEM (pro-
ton exchange membrane) fuel cells or SOFC (solid oxide
fuel cells) and the like.

25 [0018] The invention also pertains to an apparatus
comprising a membrane steam reformer heated by flameless

distributed combustion to produce hydrogen that may be used for a variety of purposes including as fuel to a high pressure molten carbonate fuel cell or a PEM fuel cell. The integrated flameless distributed combustion-
5 membrane steam reforming reactor of the present invention comprises:

10 A reforming chamber comprising a generally tubular reactor having two concentric sections comprising a larger outside section and a smaller inside section and an annulus between said sections, wherein said outside section has an inlet for preheated air and a corresponding inlet for fuel gas, with a flow path between and a plurality of flameless distributed combustors arranged in a circular path in said out-
15 side section; and wherein said inside section has an inlet for sweep gas and an outlet on said opposite end for sweep gas and H_2 , and said annulus has an inlet for vaporizable hydrocarbons and an outlet for by-product compounds and a perm-selective, hydrogen-
20 permeable membrane positioned either on the inside or outside of the annular section.

[0019] The present invention also pertains to a flameless distributed combustion (FDC) heated, membrane, steam reforming reactor comprising:

25 a) a reforming chamber containing a reforming catalyst bed, the reforming chamber having an inlet for

vaporizable hydrocarbon and steam, a flow path for hydrogen and by-product gases resulting from the reforming reactions taking place in the reforming chamber and an outlet for the by-product gases,

- 5 b) at least one flameless distributed combustion (FDC) chamber in a heat transferring relationship with the reforming catalyst bed whereby a distributed, controlled heat flux is provided by the FDC chamber to the reforming catalyst bed, said FDC chamber comprising an inlet and a flow path for an oxidant, an outlet for combustion gas and further comprising a fuel conduit having an inlet for fuel and a plurality of fuel nozzles which provide fluid communication from within the fuel conduit to the flow path of the oxidant, the plurality of fuel nozzles being sized and spaced along the length of the fuel conduit so that no flame results when the fuel is mixed with the oxidant in the FDC chamber;
- 10 c) a preheater for preheating the oxidant and/or fuel to a temperature that when the fuel and oxidant are mixed in the FDC chamber, the temperature of the resulting mixture of oxidant and fuel will exceed the autoignition temperature of said mixture; and
- 15 d) at least one hydrogen-selective, hydrogen permeable, membrane tube in contact with the reforming catalyst bed, the membrane tube having an
- 20
- 25

outlet whereby hydrogen formed in the reforming chamber permeates into said membrane tube and passes through said outlet.

[0020] In a preferred embodiment of the invention, the
5 aforesaid FDC heated, membrane, steam reforming reactor contains multiple FDC chambers (preferably, but not necessarily, in the form of tubes) and multiple hydrogen-selective, hydrogen permeable membrane tubes disposed in, or otherwise in contact with, the reforming catalyst bed
10 in the reforming chamber. Examples of multi-tubular reactors in accordance with the invention are shown in Figures 8-9, 11-12, and 14-17.

[0021] The multi-tubular, FDC heated, membrane, steam reforming reactors in accordance with the invention may
15 be either of the radial flow type as shown in Figures 8 and 9, or may be of the axial flow type as shown in Figures 11-12 and 14-17. In a radial flow reactor the gases generally flow through the reforming catalyst bed radially from outside to inside (or from inside to out-
20 side), while in an axial flow reactor the gases generally flow through the reforming catalyst bed in the same direction as the axis of the reactor. In the case of a vertical reactor, the flow would be from the top of the reactor to the bottom, or the bottom of the reactor to the
25 top.

[0022] The multi-tubular, FDC heated, membrane steam reforming reactors in accordance with the present invention may contain from as few as 2 FDC tubes up to 100 or more, depending the size of the FDC tubes, the size of
5 the catalyst bed and the level of heat flux desired in the catalyst bed. The size of the FDC tube can vary from about 1 inch OD up to about 40 inches or more OD. The number of hydrogen-selective membrane tubes may also vary from as few as 2 up to 400 or more. The size of the mem-
10 brane tubes may vary from about 1 inch up to about 10 inches or more. In general, the ratio of FDC tube surface area to membrane tube surface area will be in the range of about 0.1 to about 20.0, preferably from about 0.5 to about 5.0. Most preferably, this ratio will be from about
15 1.0 to about 3.0. The term "surface area" when used in reference to the above ratios, means the external (circumferential) area of the FDC tubes and the membrane tubes. For instance, a 1 inch OD tube of 12 inches length would have an external surface area of 37.6 square
20 inches.

[0023] Each FDC tube or chamber will have at least one fuel conduit disposed therein. Larger FDC chambers generally will have multiple fuel conduits. The FDC chambers or tubes employed in the multi-tubular reactors of the
25 invention may be "open ended" or "closed ended" as discussed below in connection with Figures 10A and 10B.

[0024] A sweep gas may be used to promote the diffusion of hydrogen through the hydrogen-selective, hydrogen permeable membrane. In case a sweep gas is employed, the membrane tube may contain an inlet and flow path for sweep gas feed and a flow path and outlet for the return of sweep gas and permeated hydrogen.

[0025] Baffles and/or screens may also be employed in the multi-tubular reactors of the present invention to improve contact of the reactive gases with the catalyst and to improve flow distribution. The FDC tubes and/or membrane tubes may also be surrounded by cylindrical screens to protect the tubes from direct contact with the catalyst.

[0026] In a further embodiment of the invention the reforming chamber of a reactor in accordance with the invention is in communication with a high pressure molten carbonate fuel cell, wherein the outlet for hydrogen from the reformer is in communication with the anode of said fuel cell and the outlet for by-product compounds is in communication with the cathode of said fuel cell.

[0027] The integrated FDC-MSR process and apparatus of this invention is capable of producing high purity hydrogen with minimal production of CO and virtually no CO in the hydrogen stream. By practice of the present invention it is possible to produce high purity hydrogen e.g., hydrogen having a purity on a dry basis of greater

than 95%. The present invention can be used to produce hydrogen having purities as high as 97%, 99%, or under optimum conditions 99+%. The effluent (by product) stream from the MSR reactor will typically contain more than 80%
 5 CO₂ on a dry basis, e.g., 90% CO₂, 95% CO₂ or 99% CO₂, and less than about 10% CO on a dry basis, e.g., less than about 5% CO, preferably less than 1% CO.

[0028] Total heat management and turbines may be included in the system to increase the efficiency and produce additional electricity or to do useful work such as
 10 compress gases or vapors.

BRIEF DESCRIPTION OF THE DRAWINGS

[0029] Figure 1 is a schematic diagram of the novel
 15 membrane steam reforming (MSR) reactor with a flameless distributed combustion (FDC) heater section, catalyst section, and permeate section placed in order from the outside in.

[0030] Figure 2 is a schematic diagram of another embodiment of the novel FDC-MRS reactor of the invention.
 20

[0031] Figure 3 is a graph showing molar fraction and methane conversion along the reactor.

[0032] Figure 4 is a graph showing temperature and heat flux per length profile along the reactor.

[0033] Figure 5 is a graph showing hydrogen molar fraction profile and membrane volumetric flux per length (in $\text{m}^3/\text{m/s}$) along the reactor.

[0034] Figure 6 is a simplified flow diagram of the zero emission flameless distributed combustion membrane steam reformer fuel hybrid power system.

[0035] Figure 7A&B is a process flow diagram of the zero emission process as simulated in a HYSYS process simulator.

10 [0036] Figure 8 is a schematic diagram of a multi-tubular, FDC heated, radial flow, membrane, steam reforming reactor in accordance with the invention. Some of the inlet and outlet streams of the membrane and FDC tubes have been omitted for simplicity.

15 [0037] Figure 9 is a cross section of the shell of the multi-tubular, FDC heated, radial flow, membrane reactor shown in Figure 8.

[0038] Figures 10A and 10B are schematic diagrams of a "closed ended" and of an "open ended" FDC tubular chamber
20 used to drive the reforming reactions in the process and apparatus of the present invention.

[0039] Figure 11 is a schematic diagram of a multi-tubular, FDC heated, axial flow, membrane steam reforming reactor in accordance with the invention.

[0040] Figures 12 is a cross section of the shell of the multi-tubular, FDC heated, axial flow, membrane reactor shown in Figure 11.




[0041] Figures 13A & 13B and 13C & 13D are schematic
5 diagrams of two baffle configurations which can be employed to increase the contact of the reactant gases with the catalyst in a multi-tubular, FDC-heated, axial flow, membrane reactor in accordance with the invention.

[0042] Figures 14, 15 16 and 17 are top cross section
10 views of the shells of other embodiments of the multi-tubular, FDC heated, axial flow, membrane, steam reforming reactors of the invention.

DETAILED DESCRIPTION OF THE INVENTION

15 [0043] One aspect of the present invention is a flameless distributed combustion heated membrane steam reformer hydrogen generator. In the design of the invention there are disclosed distinct improvements in overall efficiency, particularly size, scalability and heat exchange.
20 change. The present invention typically employs only one reactor to produce the hydrogen versus typically four reactors used in conventional processes, and part of the heat load is supplied by reaction (R2). The design of the invention captures essentially all of the heat in the
25 reaction chamber since heat exchange occurs on a molecular level, which reduces the overall energy requirements.

[0044] The reactions and enthalpies typically involved in a steam reforming process can be represented as follows:



[0045] Using conventional methods, it is not possible
10 to integrate the reforming and shift reactions into one reactor since the reactors must be operated at significantly different temperatures to obtain high product yields. Table 1 shows the typical values of the equilibrium constants for the three reactions (R1) to (R3) at
15 500° and 900°C.

Table 1:
Values of the equilibrium constants for reactions (1)-(3)
at 500 and 900°C.

Reaction	500°C	900°C
$\text{CH}_4 + \text{H}_2\text{O} \leftrightarrow \text{CO} + 3 \text{H}_2$	0.015072862 Bar ²	851.0293252 Bar ²
$\text{CO} + \text{H}_2\text{O} \leftrightarrow \text{CO}_2 + \text{H}_2$	5.519535307	0.623747734
$\text{CH}_4 + 2\text{H}_2\text{O} \leftrightarrow \text{CO}_2 + 4 \text{H}_2$	0.083195196 Bar ²	530.8276134 Bar ²
$K_1/K_3 = 1/K_2$	0.181	1.61

5

[0046] It is shown from the ratio of K_1/K_3 that high temperature favors the reaction (R1).

[0047] Chemical equilibrium and heat transfer limitations are the two factors that govern the production of hydrogen from methane in conventional reactors. These factors lead to the construction of large reactors fabricated from expensive high temperature tolerant materials. They are enclosed in high temperature furnaces that are needed to supply the high heat fluxes.

15 [0048] In the present invention the two major limitations of chemical equilibrium and heat transfer are overcome by the innovative combination of an in-situ membrane separation of hydrogen in combination with a flameless heat source comprising flameless distributed combustion

20 (FDC) that makes it possible to more efficiently use all

the energy in the system, as well as provide load following capabilities.

[0049] Hydrogen removal across the membrane shifts the methane conversion to high values, well above the equilibrium condition at 500°C. Integrating the reforming and shift reactions into one reactor reduces the energy needed to produce the hydrogen since reaction (R2) is exothermic and partially offsets the endothermic reaction (R1). Therefore, the combination reaction, (R3), requires the lowest enthalpy input to convert methane to hydrogen. Moreover, reaction (R3) produces more hydrogen per unit methane (twice as much as that contained in CH₄) and, finally, a most attractive feature is that it produces CO₂ at the expense of CO.

[0050] The reformer of the present invention reduces the operating temperature of the steam reforming reactor close to the lower temperature used in a shift reactor. With the temperatures for the steam reforming and shift closer, both operations are combined into one reactor. With both reactions occurring in the same reactor the exothermic heat of reaction of the shift reaction is completely captured to drive the endothermic steam reforming reaction. This reduces the total energy input for the sum of the reactions by 20%. The lower temperature reduces stress and corrosion and allows the reactor to be constructed from much less expensive materials. Combining

the operations also reduces the capital and operating cost since only one reactor, instead of two or three, are required, and since heat exchange equipment on the shift reactor is not required, the reactor design of the present invention allows the unit to be scaled to smaller size.

[0051] The in-situ membrane separation of hydrogen employs a membrane fabricated preferably from an appropriate metal or metal alloy on a porous ceramic or porous metal support, as described below, to drive the equilibrium to high conversions. With constant removal of the hydrogen through the membrane, the reactor can be run at much lower than the commercially practiced temperatures of 700-900°C. A temperature of 500°C is sufficient to drive the kinetics to high conversions when the equilibrium is shifted using the hydrogen separation membrane. At this temperature the selectivity to CO₂ is almost 100%, while higher temperatures favor the formation of CO as a major product.

[0052] The advantages of the use of the membrane in the reactor are summarized as follows:

- The yields are higher than that possible at equilibrium and may be as high as 100%.
- Efficient operation at lower temperatures allows production of CO₂ as the main by-product. The production

of CO₂ as the main by-product has enthalpy, hydrogen yield, and waste disposal advantages. Also, it permits the construction of reactors from much less expensive materials.

- 5 • High pressure favors the equilibrium, whereas, in contrast, in traditional systems equilibrium is not favored. The net mole change in the catalyst side is negative when more than 50% of produced hydrogen is permeated (see reaction (3)). Moreover, pressure helps
10 drive the hydrogen through the membrane. Finally, the high pressure keeps the gas velocity at a reasonably low level of about 1 m/s or less, thus, protecting the catalyst from attrition.
- There is reduced catalyst deactivation and coking tendency
15 at the lower temperature and higher pressure, even though the hydrogen partial pressure is lower than a conventional reactor. This allows the catalyst to deactivate slower and require less frequent replacement.
- Pure hydrogen is produced (diluted in steam or other
20 sweep gas) on the permeate side of the membrane without any other impurities that might affect fuel cell performance. The remaining stream contains high concentration CO₂, a stream ideal for CO₂ sequestration. Trace amounts of the methane, hydrogen, and CO from the

MSR effluent may be oxidized in a catalytic converter to produce CO_2 and H_2O before sequestration.

[0053] Figure 1 shows a schematic diagram of a membrane steam reforming reactor with a flameless distributed combustion (FDC) heater section, catalyst section, and permeate section. The reactor 1 shown in Figure 1 consists of two concentric sections. The outer concentric section 2 is the FDC heater section, while the inner concentric section 3 is the permeate section. The annulus, 4, in between is the catalyst section. Reforming catalyst is loaded into the annulus section 4 wherein the above-described reactions take place. (section 4 is also variously referred as the catalyst section, the reaction section or the reaction zone). The membrane, 8, is represented on the inside of the small section, 3, (the permeate section) in Figure 1. The FDC fuel tubes, 10, are placed in a circular pattern in the FDC heating section, while the air flows in that annular region surrounding the fuel tubes. While Figure 1 shows the FDC heater section, catalyst section and permeate section placed in order from outside in, the location of the membrane and FDC heater section can be reversed to achieve higher membrane area.

[0054] The feed gas stream containing a mixture of vaporizable hydrocarbon (e.g. naphtha, methane or methanol) and H_2O with a minimum overall O:C ratio of 2:1 enters

catalyst section 4 at 5. If used, sweep gas for promoting the diffusion of hydrogen through the membrane enters the top of the permeate section 3 at 6. Alternatively, sweep gas can be introduced into the permeate section by means of a stinger pipe fitted to bottom of the permeate section. In case of this alternative, hydrogen in sweep gas would exit the permeate zone at the bottom of the permeate section at 12. Optionally, the stinger pipe to introduce the sweep gas may be connected at the top of the permeate section in which case the hydrogen and sweep gas would exit at the top of this section. Preheated air enters the FDC heater section at 7. Hydrogen (pure or in sweep gas) exits at 12. Flue gas from the FDC heater section exits at 11. Unreacted products and by-products (e.g., CO_2 , H_2O , H_2 , CH_4 , and CO exit catalyst section 4 at 13. Fuel 14 (which may include a portion of the hydrogen exiting the permeate section or part of the reactor effluent) enters the FDC fuel tubes 10 as shown and is mixed with the preheated air in the FDC heating section. It is also possible to remove the produced hydrogen using a vacuum instead of a sweep gas.

[0055] Figure 2 shows a schematic diagram of another embodiment of the integrated FDC-MSR reactor of the present invention. The reactor depicted in Figure 2, similar to the reactor in Figure 1, has an outer concentric FDC heater section 2 and an inner permeate section

3, with an intermediate catalyst section 4 containing catalyst 9. The catalyst section also contains a layer of inerts 15 at the top of the catalyst section. A feed stream containing a vaporizable hydrocarbon (e.g. naphtha, methane or methanol) and steam enter the reactor at 5, while sweep gas, if used, enters the reactor at 6. Fuel for the FDC heater section enters fuel tubes 10 at 14. However, in the case of this embodiment the fuel enters the FDC heating section at the top of the section and flows concurrently with the preheated air (or other oxidant) which enters the FDC heating section at 7. The flow in the FDC heating section is also concurrent with the flow of the reactant gases in section 4. Fuel tubes 10 have a plurality of openings or nozzles sized and spaced along the length of the fuel tubes so that the amount of fuel mixing with the air or oxidant in the annular part of the FDC section surrounding the fuel tubes can be controlled to achieve the desired heat distribution along the length of the FDC heating section which in this embodiment surrounds the reaction section. Flue gas containing very low levels of NO_x leaves the FDC heater section at 11, while effluent from the catalyst (reaction) section exits at 13. Hydrogen formed in reaction section permeates through hydrogen-selective, hydrogen-permeable, membrane 8 and exits the permeate section (as such or with sweep gas) at 12.

[0056] The novel integrated FDC-membrane steam reforming reactor of the present invention operates at a lower temperature than that used in conventional steam methane reformers. A suitable temperature is less than about 5 700°C, for example in the range of from about 300 to about 650°C. In some cases lower temperatures, e.g., as low as about 200°C can be used up to about 600°C. A preferred range is from about 400 to about 550°C, more preferably from about 400°C to about 500°C. Suitable pressure is in 10 the range of from about 1 to about 200 bar, preferably from about 10 to about 50 bar. The simulation in Example 1 of the present invention was carried out at a temperature of about 500 °C and 30 Bar. This low temperature achieves high selectivity to CO₂ and negligible selectivity to CO. 15

[0057] The fact that the membrane steam reformer of the invention can operate efficiently at lower temperatures permits the use of less expensive materials in the construction. Materials typically used in reactors are 20 alloys having high concentrations of chromium and nickel, such as, for example a composition known in the art as HK40 containing 25% Cr and 20% Ni, the balance being iron. Lower temperatures would allow the use of alloys containing more stainless steel, such as, for example,

AISI 304 stainless steel, containing 18% Cr and 8% Ni, the balance comprising iron.

[0058] Another advantage of the integrated FDC-MSR reactor of the invention is that it does not require a pre-
5 reformer to process heavier feeds. Conventional reformers use a prereformer to convert heavier feeds to methane upstream from the main steam reforming reactor. The reactor of the present invention permits the processing of less expensive heavier feeds with unfavorable H:C ratios without the use of a prereformer.
10

[0059] Any vaporizable (or optionally oxygenated) hydrocarbon can be used in the present process and apparatus, including, but not limited to, methane, methanol, ethane, ethanol, propane, butane, light hydrocarbons having 1-4 carbon atoms in each molecule, and light petroleum fractions like naphtha at boiling point range of 120-400 °F, which is a typical feed for commercial steam reformers. Petroleum fractions heavier than naphtha can also be employed like diesel or kerosene or jet fuel at
15 boiling point range of 350-500 °F or gas oil at boiling point range of 450-800 °F. Hydrogen, carbon monoxide and mixtures thereof, e.g., syngas, may also be used in the process and apparatus of the present invention, and are included in the definition of "vaporizable hydrocarbon".
20 Methane was used in the examples to demonstrate the process.
25

[0060] . . Another advantage of the FDC-MSR reactor of the invention is that one can employ lower oxygen to carbon ratios (O:C ratios) than with conventional steam methane reformers without incurring coking problems. With conventional steam methane reformers the typical minimum O:C ratio which can be used is about 3:1 before incurring moderate to severe coking problems. With the FDC-MSR process and apparatus of the present invention it is possible to use O:C ratios as low as 2.8, down to 2.6, without coking problems, with the minimum O:C ratio being about 2:1. This results lower energy costs if methane is used as the feed in the present invention, since lower steam to methane ratios can be used thus requiring less energy to vaporize water. Because of the ability to operate at lower O:C ratios, it is also possible to use heavier, less expensive feeds in the FDC-MSR reactor of the present invention than can be used in conventional steam methane reformers.

[0061] In another embodiment of the invention, the integrated FDC-MSR process and apparatus of the invention can be used to perform water-gas-shift reactions on syn-gas mixtures (i.e., mixtures of hydrogen and carbon monoxide) produced from conventional processes like Catalytic Partial Oxidation (CPO), Steam Methane Reforming (SMR) and Autothermal Reforming (ATR). The integrated FDC-MSR reactor is well suited for this since it produces

high purity hydrogen and converts carbon monoxide to carbon dioxide and more hydrogen. Thus, the versatile FDC-MSR reactor of the invention is capable of replacing the high temperature shift, low temperature shift and

5 methanation reactors and the hydrogen purification section. A mixture of syngas and vaporizable hydrocarbon can also be used to yield a net reaction which may be either endothermic, thermally neutral or slightly exothermic.

[0062] The reactor annulus is packed with steam reforming catalyst and equipped with a perm-selective
10 (i.e., hydrogen selective) membrane that separates hydrogen from the remaining gases as they pass through the catalyst bed. The steam reforming catalyst can be any known in the art. Typically steam reforming catalysts
15 which can be used include, but are not limited to, Group VIII transition metals, particularly nickel. It is often desirable to support the reforming catalysts on a refractory substrate (or support). The support is preferably an inert compound. Suitable compounds contain elements
20 of Group III and IV of the Periodic Table, such as, for example the oxides or carbides of Al, Si, Ti, Mg, Ce and Zr. The preferred support composition for the reforming catalyst is alumina.

[0063] The catalyst used in the examples to demonstrate
25 the present invention was nickel on porous alumina. As the hydrogen is formed in the catalyst bed, it

is transported out through the hydrogen-permeable separation membrane filter. Advantages of this technology include the capacity to separate essentially pure hydrogen from any poisons that may also be present, including CO
5 and H₂S, and from other fuel diluents. The poisons do not pass through the separation membrane, which is fabricated from one of a variety of hydrogen-permeable and hydrogen-selective materials including ceramics, carbon, and metals.

10 [0064] Membranes which are suitable for use in the apparatus and process of the present invention include, but are not limited to, (i) various metals, such as hydrogen permeable transition metals selected from Group IIIB, IVB, VB, VIIB and VIIIB of the periodic table and
15 metal alloys or metal hydrides of such metals, (ii) molecular sieves, ceramics, zeolites, silica, alumina, refractory metal oxides, carbon, (iii) organic polymers, and mixtures thereof. Illustrative, but non-limiting, examples of hydrogen separating devices utilizing such
20 membranes include the membranes described in U.S. 5,217,506, issued June 8, 1993 to David J. Edlund et al, U.S. 5,259,870, issued November 9, 1993 to David J. Edlund et al and U.S. 5,451,386, issued September 19, 1995 to Collins et al, all of which are incorporated herein by
25 reference.

[0065] Illustrative, but non-limiting examples, of materials suitable for use as a support for the membranes which may be used in the apparatus and process of the present invention include an inorganic porous material
5 such as palladium, platinum, palladium alloys, porous metals such as porous stainless steel, porous silver, metal mesh, sintered metal powder, refractory metals, metal oxides, ceramics, porous refractory solids, honeycomb alumina, aluminate, silica, porous plates, zirconia,
10 cordierite, mullite, magnesia, silica matrix, silica alumina, porous Vycar, carbon, glasses, and the like.

[0066] Membranes, which are especially suitable for use in the present invention, include various metals and metal alloys on porous ceramic or porous metal supports.
15 The porous ceramic or porous metallic support protects the membrane surface from contaminants and, in the former choice, from temperature excursions. The preferred membrane support is porous stainless steel. Alternatively, the Pd layer can be deposited on the outside of the porous ceramic or metallic support, in contact with the
20 catalyst section. The inertness, range of porosity available, and the fact that, to some extent, alumina can function as an insulator, also make it a good choice for the support. Additional advantages include the fact the
25 alumina can function to filter off material that might deposit on the membrane and plug it. The use of alumina

also makes it possible to control the distance of the membrane from the catalyst section, and, therefore, control the temperature drop across the operating membrane at a given temperature and maximum effectiveness, and lessens the likelihood of overheating. It is also possible to use the ceramic support as an insulating layer to keep the membrane at the design temperature. The temperature of the sweep gas may also be controlled to adjust the membrane temperature. The membrane permeate side can provide extra heat transfer area, with superheated steam used as sweep gas and also as a heat transfer fluid for heating and temperature control. Also, a combustion catalyst with some oxygen injection via a perforated tube can oxidize some of the produced hydrogen to supply the enthalpy to drive the steam reforming reaction. The presence of Pd or Pd-alloy in the vicinity of the air and hydrogen mixture makes this reaction occur at lower temperature than the autoignition temperature of hydrogen and air (which is 571 °C). This results in a heat source that does not exceed the maximum operating temperature of the preferred Pd membrane, which is around 550°C. This internal heating concept is based on flameless distributed combustion concepts and is an example of inverse combustion and may be used with or without catalyst surrounding the perforated tube that supplies the oxygen. Optionally, a suitable methanation catalyst may be placed

in the permeate compartment as an extra safeguard to CO penetration through the hydrogen membrane if small pin-holes develop. This catalyst could convert CO to methane and keep the CO level in the hydrogen stream always in the parts per million range. Typically, the CO level in the hydrogen stream exiting the membrane steam reforming reactor of the present invention will be less than about 10 ppm, e.g., less than 5 ppm, 2ppm, 1ppm or 0.1 ppm.

[0067] Preferred materials for fabricating said membrane include mainly, but not exclusively, metals of Group VIII, including, but not limited to Pd, Pt, Ni, Ag, Ta, V, Y, Nb, Ce, IN, Ho, La, Au, etc. particularly in the form of alloys. Pd and Pd alloys are preferred. The membrane used to demonstrate the present invention was a very thin film of a palladium alloy having a high surface area. Membranes of this type can be prepared using the methods disclosed in U.S. 6,152,987, which is incorporated by reference herein in its entirety. Platinum or a platinum alloy would also be suitable.

[0068] As mentioned, with respect to Figure 1, the membrane is pictured on the inside of the smaller (i.e., the inner) concentric section, which reduces the surface area to a minimum. In order to obtain greater flux the membrane could be placed on the outside of the larger section of the reactor. Changes in geometry of the membrane permit a number of options depending on require-

ments as will be apparent to those skilled in the art.

For example, one option is to place the membrane on the outside of the reactor wall to achieve higher surface area. If in Example 1 the membrane was placed on the outside tube of the 14 cm diameter, the surface area value can be increased by a factor of 2. Also, it is possible to use more tubes of smaller diameter to achieve a higher surface to volume ratio. A jagged cross-section of the membrane tube (with star shape for instance) could increase the surface area. Finally, the space velocity of the gas may be reduced by 2-3 or 2200-3300 h⁻¹ to allow more time for the hydrogen to diffuse through the membrane.

[0069] The reactor model indicates that the reactor is H₂ transfer limited while the reaction kinetics is very fast. This means that improvements in membrane permeability will allow higher space velocities or higher conversion.

[0070] The hydrogen separation membrane used in Example 1 was a Pd-alloy (Ag, Ta, V, etc.) thin film of 1 μm or less with a high surface area. The Pd-alloy film is supported on a porous ceramic matrix that acts as the mechanical support and a filtration medium to prevent coke from covering the membrane. The porous ceramic support also acts as an insulator to reduce heat losses from the reactor. It also keeps the membrane at the specified

temperature for optimum performance and stability. This special design geometry is highly efficient. The permeability used for the base case is $7.8 \cdot 10^{-2}$ std-
 $\text{m}^3/\text{m}^2/\text{s}/\text{Bar}^{0.5}$ which is a number 2-30 times higher than re-
5 ported in the literature (see Table 2).

[0071] The issue of optimum permeability is dependent on producing membranes of 3-10 times smaller thickness than currently published or finding an alloy of better permeability than the reported alloys. Membranes be-
10 tween 25-75 μm thickness are commercially available. Alfa Aesar offers 5 μm thick unsupported Pd foils at 0.05 m x 0.05 m and Souleimanova et al have made supported membranes of 5 microns thickness. ECN and Haldor-Topsoe have made 4 μm thick Pd films on ceramic sup-
15 ports. Work in the art indicates that developmental advances will permit commercial manufacturers to make membranes layers thinner than 1 μm . Table 2 below notes the values of permeability found in the literature. The value used in the model is only one order of magnitude higher
20 than the commercial Pd-Ag film and even closer to the Pd-Ta value of Buxbaum.

Table 2:

5 Different values of hydrogen permeability over Pd or Pd-alloy membranes. Temperature increases the permeability, so that the value at 400 °C may be about 20% lower than at 500 °C.


Permeability, $\text{sm}^3/\text{m}^2/\text{s}/\text{Bar}^{0.5}$	Membrane Type	Source	Relative Factor (cor- rected to 500°C)
0.00307 (400 °C)	Pd-coated Ta tubes, 50 μm tube wall thickness	REB Research commer- cial literature	0.53
0.0045 (600 °C)	Pd layer of 5 μm	Souleimanova et. al, Journal of Membrane Science, 166/2, 249 (2000).	0.66
0.00445 (400 °C)	Pd-Cu al- loy at 25 μm film	Oremet-Wah Chang (com- mercial literature)	1.00
0.00556 (350 °C)	Pd-Ag on PSS 316L at 11.7 μm film with Fe_2O_3 layer	Prof. Ed Ma, seminar abstract and patent WO 99/30806	1.45
0.00815 (350 °C)	Pd-Ag on ceramic at 4 μm film	ECN non-confidential personal communication	2.13
0.00604 (300°C)	10-15' μm Pd	Walter Juda et al., US 6,103,028	1.88
0.0104 (420 °C)	Pd-coated Ta tubes, 70 μm Ta tube wall thickness, 3-10 μm Pd thickness	Buxbaum, R.E. et al, Hydrogen transport through tubular mem- branes of palladium- coated tantalum and niobium, Ind. Engng Chem Res, 35, 530-537, 1996	2.21

Permeability, $\text{sm}^3/\text{m}^2/\text{s}/\text{Bar}^{0.5}$	Membrane Type	Source	Relative Factor (cor- rected to 500°C)
0.0204 (520 °C)	Pd layer of 3 μm	Yeung et al., Studies in Surface Science and Catalysis, 101, 1996.	3.45
0.042 (350°C)	Pd layer of 4 μm on ceramic tube	Haldor-Topsoe-4 th Intl. Conf. On Catalysis in Membrane Reactors- 2000; abstract and pa- per	10.9
0.078 (500 °C)	Pd alloy ≤ 1 μm thick	Assumed in Examples 1&2	13.7

[0072] Steam is not known to cause a problem in mem-
brane stability, however, if any problems developed at
higher temperatures, the replacement of water with recy-
5 cled carbon dioxide or nitrogen as sweep gas is a viable
alternative. Other sweep gases could be used, like hydro-
carbons, or mixtures thereof, with a moderate boiling
point of 100-400 °C. These would condense at temperatures
closer to the permeate outlet temperature and thus reduce
10 the energy loss during cooling and reheating of the sweep
gas. Hydrocarbons have lower condensation enthalpy than
water, thus, they may reduce the heat exchanger size re-
quirements. They can also reduce the sweep gas impuri-
ties in the purified H_2 stream since they have low vapor
15 pressure at the condensation temperature. A mixture of
hydrocarbons can make the condensation occur in a range

of temperatures, and thus, avoid the pinch point limitation occurring with a single and sharp boiling point.

[0073] In the present invention heat transfer limitations are overcome by the innovative use of flameless distributed combustion (FDC) as the primary heat source. FDC is used to distribute heat throughout the reactor at high heat fluxes without high temperature flames and with low NO_x production. This is achieved by injecting small quantities of fuel into a preheated air stream and reaching autoignition conditions. Fuel quantity is controlled by nozzle size, the temperature rise is very small, and there is no flame associated with the combustion (combustion is kinetically limited, rather than mass-transfer limited). The reaction in the case where methane is used as fuel for FDC is:



Comparing the enthalpies of reaction (R4) with (R3) above, it is obvious that the minimum amount of methane that needs to be combusted in order to support reaction (3) is 17% of the total methane used (ratio of 1:4.9 to the reformed methane).

[0074] Flameless distributed combustion is disclosed in U.S. 5,255,742, U. S. 5,862,858, U. S. 5,899,269, U.S. 6,019,172, and EP 1 021 682 B1 the disclosures of which

are hereby incorporated by reference herein in their entirety.

[0075] An important feature of the flameless distributed combustion is that heat is removed along the length
5 of the combustion chamber so that a temperature is maintained that is significantly below what an adiabatic combustion temperature would be. This almost eliminates formation of NO_x, and also significantly reduces metallurgical requirements, thus permitting the use of less expensive materials in construction of equipment.
10

[0076] Generally, flameless combustion is accomplished by preheating combustion air and fuel gas (e.g., methane, methanol, hydrogen and the like) sufficiently such that when the two streams are combined the temperature of the
15 mixture exceeds the autoignition temperature of the mixture, but to a temperature less than that which would result in the oxidation upon mixing, being limited by the rate of mixing. Preheating of the combustion air and fuel streams to a temperature between about 1500°F and
20 about 2300°F and then mixing the streams in relatively small increments will result in flameless combustion. For some fuels such as methanol, preheating to a temperature above about 1000°F is sufficient. The increments in which the fuel gas is mixed with the combustion gas
25 stream preferably result in about a 20° to about 200°F

temperature rise in the combustion gas stream due to the combustion of the fuel.

[0077] With most steam methane reforming processes controlling the temperature in the catalyst bed is a
5 problem. The advantages of the flameless distributed combustion as a heat source in the present process and apparatus can be summarized as follows:

- FDC helps maintain a more uniform temperature, but simultaneously controls heat flux to match the local heat
10 needed for the material left to be reacted. At the highest heat flux there is as much heat present as can be accommodated by the reaction and as the process progresses less and less heat is required to drive the reaction.
- 15 • FDC has a lower maximum-temperature combustion gas.
- FDC does not have hot spots which might damage the hydrogen-selective, hydrogen permeable membrane.
- FDC has a negligible NO_x production.
- FDC makes it easier to tailor axial heat flux distribution to minimize entropy production or energy loss and,
20 thus, making it more efficient.
- FDC permits a more compact reactor design that is less expensive to build.
- FDC permits a modular reactor design, at a wide range
25 of sizes and heat duties.

- FDC provides a tapered heat flux profile.

[0078] Thus, the flameless distributed combustion (FDC) used to drive the steam reforming reactions in the present invention can be described as comprising:

- 5 a) preheating either a fuel gas or oxidant or both to a temperature that exceeds the autoignition temperature of the mixture of the fuel gas and oxidant when they are mixed;
- b) passing said fuel gas and oxidant in into a heating zone which is in heat transferring contact
10 along a substantial portion of the reaction zone (i.e., the zone in which said reforming reactions take place); and
- c) mixing the fuel gas and oxidant in said heating
15 zone in a manner that autoignition occurs, resulting in combustion without high temperature flames, thereby providing uniform, controllable heat to said reaction zone.

[0079] In the practice of the invention, some degree
20 of sulfur removal will probably be necessary to protect the palladium material making up the hydrogen permeable separation membrane and the Ni reforming catalyst. Sulfur is a temporary poison to such catalysts, but the catalyst activity can be regenerated by removing the
25 source of sulfur. The sulfur tolerance of commercial reforming catalysts is dependent upon process conditions.



On average, sulfur must be reduced to below 10 ppb to allow the catalyst to function properly.

[0080] Feed clean up with ZnO beds or by other means known in the art may be used to remove impurities such as
 5 H₂S and other sulfur containing compounds in the feed that could contribute to membrane degradation. For heavier hydrocarbons, like naphtha, some hydrotreating may be necessary to convert organic sulfur to H₂S, as known in the art. Heavy oil, solids carried by liquid water, oxygen,
 10 amines, halides, and ammonia are also known poisons for palladium membranes. Carbon monoxide competes with hydrogen for active surface sites, thus reducing the hydrogen permeability by 10% at 3-5 Bar. Thus, the partial pressure needs to stay low for best performance, as is
 15 the case in our preferred design.

[0081] In another embodiment of the present invention the FDC-MSR generated pure hydrogen is used in an integrated design to power a fuel cell. This embodiment of the present invention has the potential for 71% or
 20 greater efficiency in the generation of electricity from starting fuel. In addition, due to the unique integration of the system, CO₂ is produced in high concentrations and is easier to separate from nitrogen, which makes the system even more efficient.

25 [0082] Referring now to Figure 6, a vaporizable hydrocarbon and steam 5 are fed into the catalyst section 4 of

a FDC-membrane reactor of the type described in Figure 1, while preheated air 7 and fuel 14 are fed into the FDC heating section 2 of the reactor containing fuel tubes 10. A sweep gas (in this case steam) is fed into the FDC-membrane reactor at 6. The produced high purity hydrogen stream, 12, is directed to the anode compartment of the molten carbonate fuel cell, 20, operating at about 650 °C and 5 Bar. The reactor effluent 13 containing the unreacted steam, CO₂ and low quantities of methane, hydrogen and CO, and the flue gas 11 from the FDC heater and air, 16 are fed to the cathode compartment of the same fuel cell, 17. The CO₂ reacts with the O₂ to form CO₃⁼ anions that transport through the molten carbonate membrane. The CO₃⁼ anions are constantly renewed. The reactions with indicated transport are described as follows:



[0083] Electricity generated by the fuel cell is shown as electrical output 21. The stream from the anode, 22, now contains the permeated CO₂ and steam but no hydrogen, nitrogen, methane or oxygen, if hydrogen and oxygen are fed in exactly 2:1 stoichiometry. A portion of stream 22 may recycled to the cathode compartment 17 of the fuel cell. The CO₂ recycle stream is shown as 23 on Figure 6. A portion of streams 22 and/or 13 also may be put through a turbine expander to generate electrical or mechanical work 30 and 24, respectively. Currently industry and governments are spending enormous amounts of money in search of practical and economical methods for separating CO₂ from turbine and other combustion exhaust streams. In the present invention CO₂ is separated from nitrogen essentially for free while electricity is simultaneously generated. Furthermore the CO₂ capture leverage is high. As shown above, each mole of methane is converted to 4 moles of H₂. Therefore 4 moles of CO₂ per mole of converted methane are required to transport the oxygen in the fuel cell and are therefore separated from the nitrogen. Thus, this process can also be used to separate CO₂ from an external CO₂ containing stream. The high concentration CO₂ stream, 29, is now a prime candidate for sequestration after the steam is condensed. The CO₂ can be used for oil recovery, or injected into subterranean formations, or converted to a thermodynamically stable

solid. Also, since the present process can operated to produce high purity hydrogen and nitrogen as well as concentrated CO₂, it can be used to facilitate the production of chemicals such as urea, which can be made from these three raw materials. Other chemicals which can be manufactured using the products and by-products of the present process include ammomia and ammonium sulfate. Other uses for the concentrated stream of CO₂ and the high purity hydrogen and nitrogen streams will be apparent to those skilled in the art.

[0084] The stream from the cathode, stream 18, contains all the nitrogen, unreacted oxygen, a little unpermeated CO₂, and trace amounts of the methane, hydrogen and CO from the MSR effluent. All or part of this stream can be put through a turbine expander (not shown) to generate work (electrical or mechanical), 19. The trace components of stream 18 may be oxidized in a catalytic converter, 26, and emitted in the atmosphere as a low CO₂ concentration containing stream, 27, containing less than 10% CO₂, preferably less than 1% CO₂. The trace components may also be oxidized inside the fuel cell if the appropriate catalyst is placed in the cathode compartment. A stream, 28, containing water and steam exits condenser 25 and is recycled to the FDC-MSR reactor, and reheated to between about 250 to 500°C.

[0085] The zero emission hybrid system of the present invention is extremely efficient. Byproduct compounds are separated, the steam and hydrogen are reheated efficiently, and electricity is produced. Furthermore, water
5 is separated from purified CO₂ which is produced in concentrations large enough to be easily sequestered. Advantages include using waste heat to raise steam and using water collected for recycling to support additional steam reforming or other beneficial uses. The system is
10 a totally integrated, extremely efficient design having the potential for greater than 71% generation efficiency as mentioned above. The 71% is approximately a 20% fractional improvement over the best results we are aware of in the art, the 60% figure mentioned above that is possible
15 under laboratory conditions. In addition to the great improvement in efficiency, the integrated design provides a concentrated source of CO₂ for capture and sequestration as well.

[0086] Fuel cells which would be suitable for use in
20 the present invention are those that could function in a highly pressurized system. Most fuel cells run at atmospheric conditions. For this reason, a high pressure molten carbonate fuel cell is preferred. However, other types of fuel cells, such as PEM fuel cells and SOFC, can
25 also be effectively combined with the FDC-MSR reactor of the present invention.

[0087] Another very attractive feature is that the FDC powered MSR hydrogen generator produces very low NO_x , especially compared with the combined processes known in the art. Due to the use of flameless distributed combustion very little NO_x is generated in this system. Furthermore, other steam reforming reactors used to generate hydrogen known in the art could not feed to the MCFC the flue gas from the furnace as in the present design, because they produce high NO_x , which would poison the molten carbonate membrane.

[0088] The following examples will serve to illustrate the invention disclosed herein. The examples are intended only as a means of illustration and should not be construed as limiting the scope of the invention in any way. Those skilled in the art will recognize many variations that may be made without departing from the spirit of the disclosed invention.

EXAMPLE 1

[0089] A simulated reaction was carried out to demonstrate the FDC powered steam reformer of this invention. The simulated reactor, as generally described in Figure 1, consisted specifically of 20 tubes of 12.19 m length and two concentric sections, 0.14 m OD on the outside and 0.096 m OD on the inside section. The catalyst was a 30%w Ni/ Al_2O_3 loaded in the annulus between the two sections (typical reforming catalysts available from manu-

facturers like Engelhard, Sud-Chemie, ICI, Haldor-Topsoe, etc.). The membrane was placed on the inside of the small section. The FDC heater tubes are placed in a circular pattern on the outside of the large section while the air
5 flows in the annular region surrounding the tubes. The permeate section was purged with steam at a flow rate equal to that of the steam feed of the catalyst section and kept at 1 Bara pressure. The simulation was run at a space velocity of 6600 h^{-1} or $656 \text{ std-m}^3/\text{h}/\text{tube}$ (at 0°C , 1
10 .Atm) and at a feed steam-to-methane ratio of 3:1. Some hydrogen was allowed in the feed (0.5%) to avoid the singularity of the rate expressions that have the hydrogen partial pressure as a division factor. The heater side is assumed to be at a uniform temperature of 500°C .
15 An optimistically high "U" (overall heat transfer coefficient) of $7400 \text{ W/m}^2\text{K}$ was assumed in this example, to exemplify the magnitude of the benefit of the membrane when the heat transfer rate is not limiting and to give an isothermal reactor temperature profile. The actual value
20 of U should be in the order of $300\text{--}700 \text{ W/m}^2\text{K}$ for ordinary furnaces (higher for FDC heaters), but even then, the model predicts the methane conversion to be 84% if the heater is at uniform 500°C temperature. This low heater temperature is not necessary. The manipulation of the
25 heater temperature to greater than 500°C to tailor the heat flux profile at lower U will yield similar benefits

with those of U equal to $7400 \text{ W/m}^2\text{K}$. This is one of the advantages of the FDC heaters. The FDC heaters can also be designed to allow the materials of the reactor to operate below a maximum design temperature, which in this case could be below 600°C . This temperature limit is by 300-400 $^\circ\text{C}$ lower than the limit used for a conventional steam reforming reactor and it allows the use of less expensive materials of construction (like stainless steel). This constitutes considerable savings in the construction and maintenance cost of a steam-reforming reactor.

[0090] The design of the FDC powered MSR reactor of the present invention also reduces the number of unit operations needed to produce hydrogen. The traditional high-temperature and low-temperature shift reactors and the methanation reactor are not needed anymore. The CO_2 removal and water removal steps are not necessary either to produce hydrogen nearly free of impurities. This process design using a MSR is a process-intensified design, with reduced volume, plot space, operator supervision construction costs, and cheaper materials. Even the cost of the Pd layer is relatively small at the preferred thickness of about 1 micron. Fabrication of the Pd layer may be a significant part of the reactor cost, but all the other savings would outweigh it.

25 [0091] A membrane reactor simulation code was written to integrate the set of reaction rate expressions for reactions R1-R3 above, together with the heat balances

actions R1-R3 above, together with the heat balances and mass balance for the permeated hydrogen. A linear pressure drop was assumed for simplicity. The reaction kinetics were taken from the literature and used in the Langmuir-Hinselwood rate form. See Xu, J., G.F. Froment, "Methane Steam Reforming, Methanation and Water-Gas Shift: I. Intrinsic Kinetics", AIChE Journal, Vol. 35, No. 1, January 1989, pp 88-96; Xu, J., and G.F. Froment, "Methane Steam Reforming, Methanation and Water-Gas Shift: II. Diffusional Limitations and Reactor Simulation", AIChE Journal, Vol. 35, No. 1, January 1989, pp 97-103; and de Deken, J., et. al., Steam Reforming of Natural Gas: Intrinsic Kinetics, Diffusional Influences and Reactor Design, Chem. React. Eng., ACS Symp. Ser., 196, Boston, 1982.

[0092] A uniform effectiveness factor of 50% was used for all reactions compared to the reported kinetics with no diffusion limitations. However, a credit factor of 2 times was applied to correct the rate expressions for the 30%w Ni in the assumed catalyst vs. the 15%w Ni used in the kinetic experiments of Xu. A Runge-Kutta fourth order integration algorithm with a variable integration step was used.

[0093] The critical parameter in the simulation results is the value of the membrane permeability. This is calculated according to Richardson's or Sievert's law:

$$D = a \frac{A}{t} (p_1^{0.5} - p_2^{0.5}) \exp\left(-\frac{b}{RT}\right)$$

where:

D is the hydrogen permeation rate in std-m³/s

A is the membrane effective surface area in m²

5 p₁, p₂ are the reactor and permeate partial pressures of hydrogen in Bara

t is the thickness of the membrane in m

T is the membrane temperature in K

R is the ideal gas constant in J/kmol/K

10 a, b are empirical constants dependent on the material of the membrane

Thus, the factor $\alpha/t \cdot \exp(-b/RT)$ is considered to describe the permeability in std-m³/m²/s/Bar^{0.5} and shows the sole dependence on the material composition and the temperature. The equation above indicates that the rate-limiting step in the transport of hydrogen across the Pd film is the atomic diffusion in the solid.

[0094] The hydrogen separation membrane in our simulations is a Pd-alloy (Ag, Ta, V, etc.) thin film of 1 μm with a high surface area exposed to the reactor side. The Pd-alloy film is supported on a porous ceramic matrix that acts as the mechanical support, filtration medium to prevent coke from covering the film, and an insulator to reduce heat losses from the reactor. It also keeps the membrane at the specified temperature for optimum per-

25

formance and stability. This special design geometry is highly efficient. The permeability used for the base case is $7.8 \cdot 10^{-2} \text{ std-m}^3/\text{m}^2/\text{s}/\text{Bar}^{0.5}$.

[0095] Results of such a simulation for our base case
5 are shown in Table 3. As seen from the simulation results methane reaches 98% conversion and only 0.95% of that reacted amount was converted to CO. The hydrogen that permeated the membrane is 99% of the total made. The outlet gas flow rate is 347 std-m³/h per tube or 53% of the in-
10 let flow rate. The estimated pressure drop is 2.4 Bar using the Ergun equation, with hollow-cylinder catalyst pellets of 1 inch "equivalent hydraulic diameter" (as defined by the ratio of $6/\alpha_v$ where α_v represents the specific surface of the particle) and a 42% bed porosity.
15 The use of hollow cylinders has the purpose of lowering the hydraulic diameter below the physical pellet diameter and achieving lower pressure drop with reduced diffusional limitations. The exit stream contains 51% steam, 45% CO₂, 3% H₂ and 1% CH₄ and 0.4% CO, or in dry-basis 92%
20 CO₂, 5.5% H₂, 1.8% CH₄ and 0.9% CO. The permeate stream contains 56% H₂ with partial pressure of 0.56 Bara while the reactor effluent H₂ is at 0.75 Bara. The reaction enthalpy needed per tube is 325 kW. Total hydrogen make is 27 metric tons/day with 99% collected on the permeate
25 side of the membrane. Results are reported in Table 3:

Table 3

SMR CATALYST KINETIC/DEACTIVATION MODEL									
PROCESS CONDITIONS			PERFORMANCE PREDIC-TIONS			REACTOR/CATALYST		out-let	
Heater top T, °C	500.0		CO Se-lectiv-ity	0.95%		Tube Flow Rate, N l/h	65625 6	3473 45	
GHSV, l/hr	6600		Methane Conver-sion	98.04 %		Tube Height, m	12.19	H2 per-meati-on, NL/h	
Pres-sure (inl et) Bara	30		H ₂ Work Rate, Kg/m ³ /h	566.7 7		Tube I. D., cm	14.00	6254 59	
			Total H ₂ make, MT/day	27.05		Total Volume, m ³	1.989		
			Tube heat Consump-tion, KW	324.9 7		Total catal. mass, kg.	1712		
	INLET GAS COM-POSI-TION	INLET GAS FLOW (N l/h)		OUT-LET GAS COM-POSI-TION	OUT-LET GAS FLOW (N l/h)	No. of Tubes	20		
Water, % m	74.90	49153 6	Water	50.81	17649 0	Heating Inten-sity	High		
Methane, % m	24.60	16143 9	Methane	0.91	3165	Heat x-coeff. W/m ² /K	7369		

SMR CATALYST KINETIC/DEACTIVATION MODEL									
PROCESS CONDITIONS			PERFORMANCE PREDICTIONS			REACTOR/CATALYST		outlet	
Carbon Dioxide, % m	0.00	0	Carbon Dioxide	45.13	156772	Model Used	Ni/Mg Al ₂ O ₄ (Xu)		
Hydrogen % m	0.50	3281	Hydrogen	2.71	9415				
Carbon Monoxide, % m	0.00	0	Carbon Monoxide	0.43	1502				
Nitrogen, % m	0.00	0	Nitrogen	0.00	0	Heater T rise, °C	0.0		
Propane, % m	0.00	0	Propane	0.00	0	Integration steps	2475		
Argon, % m	0.00	0	Argon	0.00	0	Radiation heat, kW	0.0		
Ethane, % m	0.00	0	Ethane	0.00	0	Heater area, m ²	5.58		
Total	100.00%	656256	Total	100.00%	347345	Membrane O.D., cm	9.6		
MW, g/mol	17.4		MW, g/mol	29.3	Average temperature, C	Membrane area, m ²	3.68	H2 recovery	
Reactor feed T, °C	500.0		Reactor outlet T, °C	499.4	496.3	Permeability, m/s/Bar ^{0.5}	7.77 E-02		
Water rate, mol/(g-cat.h)	-223.204		Water rate, mol/(g-cat.h)	0.097		Sweep gas flow, N l/h (steam)	491536		

SMR CATALYST KINETIC/DEACTIVATION MODEL								
PROCESS CONDITIONS			PERFORMANCE PREDIC-TIONS			REACTOR/CATALYST		out-let
CO rate, Mol/g-cat.h)	5.435		CO rate, Mol/g-cat.h)	0.40		Permeate pres-sure, bar	1.000	
Pressure Drop, Bar	2.4		Pres-sure (ou t-let), bara	27.6		Init. Permea-tion, N l/h/n	326653	
						Pd thick-ness, μm	1	
						Pd weight, kg	6.6186	

[0096] Figure 3 shows the evolution of molar fractions and methane conversion along the catalyst bed. It is clear that significant conversion is attained at the entrance to the reactor, until the equilibrium is reached. Subsequently hydrogen permeation drives the reaction. This indicates that the kinetics is fast and that the membrane flux is the rate-limiting process.

[0097] Figure 4 shows the evolution of temperature and heat flux along the reactor. Clearly, for a nearly isothermal reactor a very high heat flux of -150 kW/m (or -340 kW/m^2) is needed at the entrance, but with a very low heat flux of -4 kW/m (or -9 kW/m^2) required at the exit. The FDC heater is an ideal means for tailoring that heat flux, far better than that achievable in a conventional furnace.

[0098] Figure 5 shows the evolution of the hydrogen molar fraction at the catalyst and permeate sides and the volumetric flux across the membrane. It appears that there is a monotonic decline in the flux and the tail of the reactor experiences the lowest pressure differential and the lowest flux. In another embodiment one could run the permeate side at lower pressure, for example, 0.5 Bara, which is achievable with a blower. Alternatively, a counter-current sweep is possible to maximize the use of the driving force between the reactor and permeate sides.

EXAMPLE 2

[0099] A simulation of the zero emission hybrid power generating process was carried out in Example 2. The set of mass and heat balances for the process was obtained using the HYSYS process simulation software offered by AEA. Referring to The Process Flow Diagram in Figure 7A&B, the process contains the following HYSYS unit operations:

1. A Gibbs Reactor, FDC-Burner, 31, to combust methane with air and provide enthalpy for the MSR reactor(Reaction 4).
- 10 2. A Conversion Reactor, MSR-Reactor, 32, for the MSR reactor to effect the given methane conversion and CO₂ selectivity that was calculated off-line from the Excel/Visual Basic model (reactions R1-R3).
- 15 3. A Conversion Reactor, Fuel Cell, 33, for the fuel cell to react the hydrogen and oxygen to water and electricity.
4. Four compressors, 34, 35, 36 and 37, to feed air to the FDC and the fuel cell, low pressure hydrogen to the fuel cell, and to recycle CO₂ to the fuel cell, requiring energy input of W_{air} , W_{air2} , W_{H2} , and W_{CO2R} . The assumed compressor poly-
- 20 tropic efficiency is 80% and it is accounted for by the simulator. Note that two compressors have exit temperatures of 242° and 248°C. Those values are essentially the upper temperature limit of ordinary compressors. Feed methane is supplied at 30 Bar and 200°C (pipeline supply) via coupling
- 25 54 which splits the methane into two streams. One methane

stream serves as feed to the FDC burner, 31, while the second methane stream passes through mixer 58 to MSR reactor 32. The steam to the MSR is prepared by heating the recycled condensate to the 30 Bar saturation temperature of steam at 234.1°C. A pump is needed to compress the water to 30 Bar, but it's not considered here, since that power is negligible compared to the power to compress a compressible gas.

5. Three turbines, 38, 39, and 40, are used in order to achieve maximum energy efficiency by recovering mechanical work (W_1 , W_2 , W_3) from high pressure and temperature streams. These streams are the MSR reactor effluent, and the fuel anode and air cathode effluents. The assumed turbine adiabatic efficiency is 90% and it is accounted for by the simulator.

6. Five heat exchangers (interchangers), 41, 42, 43, 44 and 45, are used to recover thermal energy from the high temperature streams and used to preheat the low temperature streams. The interchangers preheat the two air streams, the hydrogen feed to the fuel cell, and the water feed to the MSR reactor. The latter is heated to saturation temperature at the given pressure.

7. One separator, 46, acts as a knock-out pot, to collect the condensed water from the fuel cell anode effluent stream and to isolate the relatively pure CO_2 for sequestration.

8. The two splitters, 47, and 48, are a HYSYS method to separate streams in a user-specified ratio to accommodate for the fact that these streams are separate in reality, but they have to enter the HYSYS reactors in a mixed state.
- 5 9. Five adjustment loops, 49, 50, 51, 52 and 53, insure that the components are apportioned correctly with each stream and that appropriate amounts of methane and air are fed to achieve the right oxygen to fuel ratio and to achieve equal heat flow in the MSR and FDC.
- 10 [0100] The energy produced in the fuel cell (W_{elec}), 21, is considered equal to the electrical power that it makes. The energy that is recovered from the turbines minus the work required by the compressors (net positive) is added to W_{elec} to give the total energy gain of the process. If we divide that
- 15 number by the methane feed rate times its lower heating value, or ca. 50,000 kJ/kg, the energy efficiency is obtained:
- $$\text{Efficiency} = (W_{elec} + W_1 + W_2 + W_3 - W_{air} - W_{air2} - W_{H_2} - W_{CO_2R}) / [m(CH_4) * D_H] =$$
- $$(1378 + 35.1 + 195.7 + 219.4 - 43.84 - 128.2 - 73.67 - 37.81) / (154.5 / 3600 \text{ kg/s} * 50 \cdot 10^3 \text{ kJ/kg}) =$$
- 20 71% energy efficiency
- [0101] In the absence of the three energy recovery turbines, the energy efficiency is at least 51%.
- [0102] Again referring to Figure 7A&B, the process has a
- 25 condensate stream from separator 46 which is split at coupling

55 into a water effluent stream, Water-purge, and a second water stream which is recycled through 60 to boiler 44, then to mixer 58 and then to MSR reactor 32. The hydrogen feed to the fuel cell passes through interchanger 42, exchanger 62, compressor 36, interchanger 43 and mixer 59 to fuel cell 33. The process also has a concentrated CO₂ stream which passes through exchanger 63, separator 46 and coupling 56 which splits the CO₂ stream into recycle stream which is recycled via 61 to compressor 37 and mixer 59 to fuel cell 33. The effluent stream, CO₂-sequest, split by coupling 56, is very concentrated in CO₂ (98.2% w, with the balance being water) which is compressed and can be injected for oil recovery, or in any other form of CO₂ sequestration or in industrial synthesis or injected into deep wells. The other effluent stream, N₂-purge, contains primarily nitrogen and is exhausted after being passed through a catalytic oxidizer (not shown here), to remove traces of unspent fuel components (approximately, 0.64% CO, 0.33% H₂, and 0.17% methane.) This stream could be a valuable source of industrial-grade nitrogen, or used for enhanced oil recovery or used in other applications apparent to those skilled in the art. Finally, a water effluent stream, Water_purge, is used to remove excess water formed in the system, and to eliminate build-up of trace impurities in the water recycle loop.

[0103] The material and energy efficiency advantage of the process in example 2 is due to the tight material and energy

integration between the Membrane Steam Reforming reactor (MSR) and the Molten Carbonate Fuel Cell (MCFC). The integration is exhibited in:

Feeding carbon dioxide made in the FDC heater and the MSR to
5 the MCFC.

1. Recycling the water used as MSR sweep gas plus that made in the MCFC, back to the MSR feed, thus, reducing water emissions to a minimum purge stream, and obviating the need of a fresh water supply.
- 10 2. Using the pressure and temperature of specific outlet streams to generate electricity in turbines, instead of producing waste heat.
3. Using the enthalpy of specific outlet streams to exchange heat with given inlet streams for reduction in net fuel use.
15 age.

[0104] This arrangement of MSR and MCFC is also advantageous in terms of transportation flexibility. Normally, natural gas produced in a remote well will require the infrastructure of a LNG plant for transportation in liquid form or a
20 natural gas pipeline. An additional option is introduced, which is that of electricity transportation to nearby residential or commercial markets. That may become more economical in specific instances.

[0105] The unique fit of the MSR for the use in electricity
25 generation using MCFC is that the MSR generates very low

amounts of NO_x emissions. This is beneficial first for environmental reasons, as the purge nitrogen has low NO_x. Moreover, the MCFC is uniquely sensitive to NO_x impurities and it would not operate with conventional furnace flue gas.

5 [0106] Finally, the uniqueness of the MSR is that it is modular and adjustable to whatever MCFC capacities are available. Any arbitrary number of MSR membrane tubes can be easily designed and constructed since each one is running independently of the others and no increase in tube diameter is
10 needed. The FDC heating is easily scalable for someone skilled in the art. As the art of MCFC progresses to larger scales and capacities, the MSR can follow this capacity without any additional research and scale-up risk.

[0107] Some MCFC's have internal reforming and, thus, can
15 use hydrocarbons as the feed fuel. However, this system has distinct advantages compared to the former. It has increased fuel processing efficiency, higher carbon dioxide partial pressure for higher current density, it can isolate the hydrogen as an intermediate, and it has the ability to capture the
20 CO₂ and the nitrogen in separate streams.

[0108] For application in Proton Exchange Membrane (PEM) fuel cells, the MSR reactor of the present invention, if operated in stand-alone mode, provides the source of high purity hydrogen that is needed by PEM's for high current density and
25 high catalyst longevity. The hydrogen from MSR can contain

virtually no CO, and it can easily achieve less than 10 ppm CO, which is the maximum tolerable by PEM Fuel Cells. If small pinhole leaks develop in the membrane, then a small catalyst bed packed inside the permeate section can eliminate the CO that leaked by converting it, in the presence of excess steam, back to methane. This methanation reaction is practiced commercially in separate reactors, but it can be done here inside the permeate tube due to the low required reaction rates, and at a very marginal hydrocarbon yield loss. Methane is not harmful to PEM fuel cells.

[0109] Moreover, the availability of distributed hydrogen in remote locations where natural gas and oil are produced together (Associated Gas) allows the opportunity to capture the value of the natural gas by converting it to hydrogen. The hydrogen can be used to remotely hydroprocess the oil with technology commonly known to refining experts. The value of the oil is increased, the amount of sulfur, nitrogen, metals and the viscosity drop, making the oil cleaner, more easily processed by refineries and more transportable.

[0110] When MSR is run in stand-alone mode, a pure nitrogen stream can be made, if part of the produced hydrogen is used as the feed fuel to the FDC heaters. The flue gas from the FDC will contain only nitrogen and steam, if a 2:1 stoichiometric ratio of hydrogen and oxygen is used. For every mole of hydrogen consumed in FDC, 1.88 moles of pure nitrogen are made. The

value of 1.88 moles of nitrogen historically equals or exceeds the value of 1 mole of hydrogen. The concept of hydrogen as an FDC fuel, not only creates extra value from hydrogen, but also eliminates the cost of natural gas that had to be used as a
5 fuel, and eliminates any CO2 emissions from FDC.

EXAMPLE 3

[0111] A palladium-on-tantalum membrane having a palladium thickness of about 5-10 microns, a tantalum thickness of 70-120 microns and a porous surface area of ca. 20 cm², closed at
10 one end, was encased in a half inch diameter stainless steel tube, and the void space filled with ca. 20 gm of bulk-metal nickel catalyst having a Ni content of ca. 45% as a 25/40 mesh powder. The unit was swept with nitrogen and the catalyst sample pretreated with hydrogen at 420°C. With steam flowing
15 through the unit under 80 psig back pressure, the temperature was raised to 500°C and a full vacuum drawn on the permeate side of the membrane. A combination of methane (3.0 sl/hr, 0.13 mole/hr) and steam (22 gm/hr, 1.22 mole/hr) were then fed to said unit and under steady state conditions the product and
20 permeate gases were analyzed.

[0112] A gas chromatography (GC) analysis of the product gases showed:

- 82% methane conversion per pass
- 98% permeation of the product hydrogen through the membrane
- 25 • 74% concentration of carbon dioxide in the product effluent

A mass spec analysis of the permeate gas showed:

- >95% purity hydrogen

EXAMPLE 4

[0113] A palladium-on-porous stainless steel membrane one
 5 half inch in diameter, having a palladium thickness of 20-30
 microns and a surface area of about 50 cm², was encased in a
 one inch diameter stainless steel tube and the void space
 filled with 52 gm of bulk-metal nickel catalyst having a Ni
 content of ca. 45%, as a 25/40 mesh powder. The unit was
 10 swept with nitrogen and the catalyst pretreated with hydrogen
 at 420 °C. With steam flowing through said unit under 75 psig
 back-pressure, the temperature was raised to 500 °C and a full
 vacuum drawn on the permeate side of the membrane. A combina-
 tion of methane (3.0 sl/hr, 0.13 mole/hr) and steam (ca. 30
 15 gm/hr) were then fed to said unit under steady state condi-
 tions and the product gases were analyzed.

[0114] GC analyses of the product gas typically showed:

- 93% methane conversion per pass
- 95% hydrogen permeation of the membrane
- 20 • 73% concentration of CO₂ in the product gas

EXAMPLE 5

[0115] A palladium-on-porous stainless steel membrane one
 half inch in diameter having a palladium thickness of 20-30
 microns and a surface area of ca. 50 cm², closed at one end,
 25 was enclosed in a one inch diameter stainless steel tube, and

the void space filled with 52 gm of bulk-metal nickel catalyst having a Ni content of ca. 45%. The unit was swept with nitrogen and the catalyst pretreated with hydrogen at 420 °C. With steam flowing through the unit under 80 psig, the temperature was raised to 500 °C and a full vacuum drawn on the permeate side of the membrane. A mix of methane (3.0 sl/hr, 0.13 mole/hr) and steam (27 gm/hr, 1.5 mole/hr) was then fed to the unit and under steady state conditions the product gas mix showed:

- 10. • 99% methane conversion per pass
- 95% hydrogen permeation of the membrane
- 79% concentration of CO₂ in the product gas

15

EXAMPLE 6

[0116] Following the procedures, and using the refurbished palladium membrane of Example 3, the unit reactor was charged with 56 gm of nickel catalyst and fed a mix of methane (3.0 sl/hr, 0.13 mole/hr) and steam (8.1 gm/hr, 0.45 mole/hr). The unit operating pressure was 380 psig. At 500°C, product effluent analyses showed:

- 25 • 92% methane conversion per pass
- 99% hydrogen permeation of the membrane
- 94% CO₂ concentration in the product effluent

Analysis of the permeate gas showed:

30

- 99% purity hydrogen

[0117] Figure 8 shows a schematic diagram of a multi-tubular, FDC heated, radial flow, membrane, steam reforming reactor in accordance with the present invention. In the reactor shown in Figure 8, a vaporizable hydrocarbon and steam enter the reactor at inlet 69 and flow through the reforming catalyst bed 70 (which is in the form of an annulus) containing multiple membrane tubes 71 and multiple FDC tubes 72 surrounded by the catalyst bed. In this embodiment the feed gases and reaction gases flow through the catalyst bed radially from outside to inside. The multiple hydrogen-selective, hydrogen permeable, membrane tubes 71 are disposed axially in concentric rows in the reforming catalyst bed and serve to remove hydrogen which is produced by the reforming reactions. The multiple FDC tubes (i.e., chambers) 72 are also disposed axially in concentric rows in the reforming catalyst bed (for example, in a ratio of 1:2 or other number of FDC tubes to the number of membrane tubes). The multiple FDC tubes are in contact with the reforming catalyst bed and provide a controlled, distributed heat flux to the catalyst bed sufficient to drive the reforming reactions. While the membrane tubes and the FDC tubes are shown to be in concentric rows in Figure 8, other geometric arrangements of these tubes can be suitably employed, and are within the scope of the present invention.

[0118] The FDC tubes 72 generally comprise a fuel conduit disposed within a larger tube with an inlet and flow path for

a preheated oxidant (e.g., preheated air) and an outlet for combustion (flue) gas. The FDC tubes may be closed ended with a fuel conduit, oxidant inlet and flow path, and flue gas outlet arranged as shown in Figure 10A, or may open ended with the fuel conduit, oxidant inlet and flow path arranged as shown in Figure 10B.

[0119] High purity hydrogen is removed from the multi-tubular, radial flow, reactor shown in Figure 8 via outlets 73, with the aid of vacuum. Optionally, a sweep gas may be used to promote the diffusion of hydrogen through the membrane of the membrane tubes 71. If a sweep gas is employed, the membrane tubes 71 may contain an outer sweep gas feed tube and an inner return tube for sweep gas and hydrogen as discussed in Figure 12. By-product gases, including unpermeated hydrogen, if not further used internally for heat production, e.g., combustion or heat exchange, exit the multi-tubular, radial flow, reactor via outlet 74. A hollow tube or cylinder 75 may optionally be used for flow distribution.

[0120] Figure 9 is a top cross-section view of the shell of the multi-tubular, FDC heated, radial flow, membrane, steam reforming reactor of Figure 8. The cross sectional view of the reactor shows multiple membrane tubes 71 and multiple FDC tubes 72 dispersed in catalyst bed 70 with optional hollow tube or cylinder 75 being in the center of the reactor. In the example shown, the membrane tubes 71 have outside diameters

(OD) of about one inch while FDC tubes have an OD of approximately two inches, although other sizes of these tubes can be suitably employed. If a sweep gas is employed, the membrane tubes 71 may contain an outer sweep gas feed tube and an inner
5 return tube for sweep gas and hydrogen as shown in Figures 12 and 14. A larger shell containing more tubes duplicating this pattern can also be used.

[0121] Figures 10A and 10B are schematic diagrams showing an example of a "closed ended" and of an "open ended" FDC tubular chamber which are used to drive the reforming reactions
10 in various embodiments of the present invention. Referring to Fig. 10A, an oxidant (in this case preheated air) enters the FDC tube at inlet 76 and mixes with fuel which enters the FDC tube at inlet 77 and passes into fuel conduit 78 through nozzles 79 spaced along the length of the fuel conduit, whereupon
15 it mixes with the air which has been preheated to a temperature such that the temperature of the resulting mixture of fuel and air is above the autoignition temperature of the mixture. The reaction of the fuel passing through the nozzles and
20 mixing with the flowing preheated air at a temperature above the autoignition temperature of the mixture, results in flameless distributed combustion which releases controlled heat along the length of the FDC tube as shown, with no flames or hot spots. The combustion gases, (i.e., flue gas) exit the FDC
25 tube at outlet 80.

[0122] In the "open ended" FDC tubular chamber shown in Fig. 10B, preheated air enters the FDC tube at inlet 76 and the fuel at inlet 77, and the fuel passes through conduit 78 and nozzles 79, similar to "closed end" FDC tube in Fig. 10A.

5 However, in the case of the "open ended" FDC tube, the flue gas exits the FDC tube at open end 81, instead of outlet 80 as shown in Fig.10A.

[0123] Figure 11 is a schematic drawing of a multi-tubular, FDC heated, axial flow, membrane, steam reforming reactor in accordance with the present invention. In the reactor shown in Figure 11, a vaporizable hydrocarbon and steam enter the reactor at inlet 69 and flow through the reforming catalyst bed 70 containing multiple hydrogen- selective membrane tubes 71 and multiple FDC tubes 72. In this embodiment the feed gases and reaction gases flow through the catalyst bed axially from the top of the catalyst bed to the bottom. The multiple hydrogen-selective membrane tubes 71 are disposed axially in the reforming catalyst bed and serve to remove hydrogen which is produced by the reforming reactions. In the embodiment shown the membrane tubes are closed at the top and a sweep gas (e.g. steam) is employed, which enters the reactor at inlet 85 into the bottom of the membrane tubes where it flows upward in the outer part of the membrane tube, counter-current to the hydrocarbon and steam feed. A stinger pipe fitted to the bottom of the permeate section may be used to distribute the sweep gas

10

15

20

25

in the membrane tube. The permeated hydrogen and sweep gas flow downward in a return tube located in the center of the membrane tube and exit the reactor via outlet 86.

[0124] There are also multiple FDC tubes (i.e., chambers) 5 72 disposed axially in the reforming catalyst bed. In the embodiment shown the FDC tubes are "closed ended" tubes with preheated air entering at inlet 76, fuel entering at 77 and combustion gas (i.e., flue gas) exiting the reactor at outlet 80. The multiple FDC tubes are in heat transferring contact 10 with the reforming catalyst bed 70 and provide a controlled, distributed heat flux to the catalyst bed sufficient to drive the reforming reactions. While the membrane tubes and the FDC tubes are shown to be in a particular geometric pattern in Figure 11, it is understood that other geometric arrangements 15 of these tubes may be used and are within the scope of the invention. While "closed ended" FDC tubes are employed in the particular reactor shown in Figure 11, "open ended" FDC tubes may be suitably employed as well. Also, the FDC tubes and/or the membrane tubes may be surrounded by cylindrical screens 20 (not shown) to protect them from getting in direct contact with the catalyst, and allow insertion of these tubes even after the catalyst is loaded into the reactor.

[0125] High purity hydrogen, which diffuses through the membrane into the membrane tubes, is removed from the reactor 25 via outlet(s) 86 together with the sweep gas (in this case

steam). While outlet 86 is shown in Figure 11 to be located on the side of the reactor, this outlet may optionally be located at the bottom of the reactor thereby avoiding a bottom side exit manifold. A further option involves the use of a vacuum
5 instead of a sweep gas to facilitate diffusion of the hydrogen through the membrane into the membrane tubes.

[0126] In another embodiment of the reactor in Figure 11, the sweep gas inlet 85 and the hydrogen, sweep gas outlet 86 and their associated plenums, may be placed on the top of the
10 reactor allowing easy access to the bottom of the reactor. In a further embodiment of the reactor of Figure 11, the pre-heated air inlet 76, the fuel inlet 77 and the flue gas outlet 80 and their associated plenums may be placed on the bottom of the reactor allowing easy access to the top of the reactor.

15 [0127] By-product gases, including carbon dioxide, steam, and minor amounts of carbon monoxide and unpermeated hydrogen, if not further used internally for heat production, e.g., combustion or heat exchange, exit the multi-tubular, axial flow, reactor via outlet 74. The reactor shown in Fig. 11 may be
20 equipped with baffles and/or screens such as the baffles shown in Figures 13A and 13B or 13C and 13D.

[0128] Figure 12 is a top cross-section view of the shell of the multi-tubular, FDC heated, axial flow, membrane reactor shown in Figure 11. In the embodiment shown multiple membrane
25 tubes 71 and multiple FDC tubes 72 are dispersed in reforming

catalyst bed 70. The multiple FDC tubes employed in this embodiment are "closed ended" FDC tubes as discussed above in connection with Figure 11. The membrane tubes are equipped with an outer sweep gas feed tube and an inner hydrogen, sweep
 5 gas return tube as discussed in connection with Figure 11. A typical reactor of the type shown in this Figure 12 may comprise, for example, 19 FDC tubes of 5.5" OD and 90 membrane tubes of 2" OD enclosed in a shell of 3.5 ft diameter containing catalyst in the void spaces. Other shell sizes and numbers
 10 of tubes can be suitably employed depending on the capacity needed.

[0129] Figures 13A and 13B and 13C and 13D show two different configurations of baffles which may be employed in the multi-tubular, FDC heated, axial flow, membrane steam reform-
 15 ing reactors of the invention to increase contact of the reactant gases with the catalyst in the catalyst beds. The baffle configuration shown in Figures 13A and 13B comprise a washer shaped baffle 87 and a disk shaped baffle 88 arranged in and alternating pattern. This baffle arrangement causes the feed
 20 and reactant gases to flow through the hole in the washer shaped baffle and be deflected by disk shaped baffle thereby enhancing the contact of the reactant gases with the catalyst (not shown) which is packed in the area between the baffles.

[0130] The baffle arrangement shown in Figures 13C and 13D
 25 comprises truncated disks 89 which are placed in and alternat-

ing pattern (truncated left and truncated right) in the reactor thereby causing the feed and reactant gases to "zigzag" as they flow through the catalyst (not shown) which is packed in the area between the baffles.

- 5 [0131] The baffles in Figures 13A&B and 13C&D will have openings (not shown) to allow the FDC tubes and membrane tubes to pass through them. Screens positioned in vertical alignment (not shown) may also be used to support the baffles and in some cases hold the catalyst away from the shell wall or from
10 the center of the shell for better gas flow distribution.

- [0132] Figure 14 is a top cross-section view of the shell of a multi-tubular reactor in accordance with one embodiment of the invention in which four membrane tubes 71 are dispersed
15 in the reforming catalyst bed 70 which is packed into reactor tube 82, while the FDC chamber is in the form of an annulus surrounding the reforming catalyst bed. The tubular FDC chamber (which is defined by outer wall 83 and the wall of the reactor tube 82) contains multiple fuel conduits 78 having noz-
20 zles (not shown) through which fuel flows and mixes with preheated air flowing in the FDC chamber whereupon flameless combustion occurs. If a sweep gas is employed, the membrane tubes 71 may contain an outer sweep gas feed tube and an inner return tube for sweep gas and hydrogen as shown in Figure 14. In
25 one embodiment of the invention, the membrane tubes have an OD

of 2 inches, while the outer FDC tube has an inner diameter (ID) of approximately 8.6 inches. However, other sizes can be suitably employed.

[0133] Figure 15 is a top cross-section view of the shell of another embodiment of the multi-tubular, axial flow, reactor of the invention in which multiple reactor tubes 82 packed with reforming catalyst are employed. In this example each of the six reactor tubes 82 contains a catalyst bed 70 and a membrane tube 71 containing an outer sweep gas feed tube and an inner hydrogen, sweep gas return tube. Heat is provided to the reforming catalyst beds by the tubular FDC chamber defined by outer wall 83 and inner wall 84. The FDC chamber contains multiple fuel conduits 78 dispersed at various intervals in the FDC chamber. A hollow tube or cylinder defined by inner wall 84 may optionally be used for flow distribution.

[0134] Figure 16 is a top cross-section view of the shell of further embodiment of the multi-tubular, axial flow, reactor of the invention in which four membrane tubes are dispersed in each of six reactor tubes 82 containing catalyst beds 70. Heat is provided to the catalyst beds by FDC chamber defined by outer wall 83 and inner wall 84. The FDC chamber contains multiple fuel conduits 78 having nozzles 79 (not shown). If a sweep gas is employed, the membrane tubes 71 may contain an outer sweep gas feed tube and an inner return tube for sweep gas and hydrogen as discussed shown and discussed

above in connection with Figures 12 and 14. The hollow cylinder or tube defined by inner wall 84 may optionally be used for flow distribution.

- [0135] Figure 17 is a top cross-section view of the shell of further embodiment of the multi-tubular, axial flow, reactor of the invention in which six membrane tubes 71 are dispersed in each of the six reactor tubes 82 packed with reforming catalyst. Heat is provided to the reforming catalyst beds by the FDC chamber defined by outer wall 83 and inner wall 84.
- 10 The FDC chamber contains multiple fuel conduits 78. Additional heat may be provided to the catalyst beds by employing an FDC tube 72 in the center of each of the reactor tubes 82 as shown in Figure 17. The hollow tube or cylinder defined by inner wall 84 may optionally be used for flow distribution.
- 15 [0136] If a sweep gas is employed, the membrane tubes 71 may contain an outer sweep gas feed tube and an inner return tube for sweep gas and hydrogen as discussed in Figure 12.

WE CLAIM:

1. A flameless distributed combustion heated, membrane, steam reforming reactor comprising:
 - 5 a) a reforming chamber containing a reforming catalyst bed, said reforming chamber having an inlet for vaporizable hydrocarbon and steam, a flow path for hydrogen and by-product gases resulting from the reforming reactions taking place in said reforming
10 chamber and an outlet for said by-product gases,
b) at least one flameless distributed combustion chamber in a heat transferring relationship with said reforming catalyst bed whereby a distributed, controlled heat flux is provided by said flameless distributed combustion chamber to said reforming catalyst bed, said flameless distributed combustion chamber comprising an inlet and a flow path for an oxidant, an outlet for combustion gas and further comprising a fuel conduit having an inlet for fuel and a
15 plurality of fuel nozzles which provide fluid communication from within the fuel conduit to the flow path of said oxidant, said plurality of fuel nozzles being sized and spaced along the length of said fuel conduit so that no flame results when said fuel is
20 mixed with said oxidant in said flameless distributed combustion chamber;
25

c) a preheater capable of preheating said oxidant to a temperature that when said fuel and said oxidant are mixed in said flameless distributed combustion chamber, the temperature of the resulting mixture of said oxidant and fuel will exceed the autoignition temperature of said mixture; and

d) at least one hydrogen-selective, hydrogen permeable, membrane tube in contact with said reforming catalyst bed, said membrane tube having an outlet whereby hydrogen formed in the reforming chamber permeates into said membrane tube and passes through said outlet.

2. The flameless distributed combustion heated, membrane, steam reforming reactor of claim 1 wherein said reforming catalyst bed is in contact with multiple hydrogen-selective, hydrogen permeable membrane tubes.

3. The flameless distributed combustion heated, membrane, steam reforming reactor of claim 2 wherein said reforming catalyst bed is in heat transferring contact with multiple flameless distributed combustion chambers.

4. The flameless distributed combustion heated, membrane, steam reforming reactor of claim 1 wherein the vaporizable hydrocarbon and steam flow axially through said reforming catalyst bed.

5. The flameless distributed combustion heated, membrane, steam reforming reactor of claim 1 wherein the vaporizable hydrocarbon and steam flow radially through said reforming catalyst bed.
- 5 6. The flameless distributed combustion heated, membrane, steam reforming reactor of claim 1 wherein a sweep gas is used to promote the diffusion of hydrogen through said membrane tube, said sweep gas being selected from the group consisting of steam, carbon dioxide, nitrogen and
10 condensable hydrocarbon.
7. The flameless distributed combustion heated, membrane, steam reforming reactor of claim 1 wherein the vaporizable hydrocarbon is selected from the group consisting of natural gas, methane, methanol, ethane, ethanol, propane,
15 butane, light hydrocarbons having 1-4 carbon atoms in each molecule, light petroleum fractions including naphtha, diesel, kerosene, jet fuel or gas oil, and hydrogen, carbon monoxide and mixtures thereof.
8. The flameless distributed combustion heated, membrane,
20 steam reforming reactor of claim 1 wherein the ratio of the surface area of said flameless distributed combustion chambers to the surface area of said membrane tubes is from about 0.1 to about 20.0.

9. The flameless distributed combustion heated, membrane, steam reforming reactor of claim 1 wherein said catalyst bed contains baffles in the form of washers and disks.

10. The flameless distributed combustion heated, membrane, steam reforming reactor of claim 3 wherein the ratio of the surface area of said flameless distributed combustion chambers to the surface area of said membrane tubes is from about 0.5 to about 5.0.

11. The flameless distributed combustion heated, membrane, steam reforming reactor of claim 1 wherein said catalyst bed contains baffles in the form of truncated disks.

12. The flameless distributed combustion heated, membrane, steam reforming reactor of claim 3 wherein the ratio of the surface area of said flameless distributed combustion chambers to the surface area of said membrane tubes is from about 1.0 to about 3.0.

13. A process for the production of hydrogen, comprising:

a) reacting steam with a vaporizable hydrocarbon at a temperature of from about 200°C to about 700°C and at a pressure of from about 1 bar to about 200 bar in a reaction zone containing reforming catalyst to produce a mixture of primarily hydrogen and carbon dioxide, with a lesser amount of carbon monoxide;

- b) providing heat to said reaction zone by employing at least one flameless distributed combustion chamber thereby driving said reaction;
 - c) conducting said reaction in the vicinity of at least one hydrogen-permeable, hydrogen-selective membrane tube, whereby hydrogen formed in said reaction zone permeates through said hydrogen selective membrane tube and is separated from said carbon dioxide and carbon monoxide.
- 5
- 10 14. The process of claim 13 wherein said reforming catalyst bed is in contact with multiple hydrogen-selective, hydrogen permeable membrane tubes.
- 15 15. The process of claim 14 wherein said reforming catalyst bed is in heat transferring contact with multiple flameless distributed combustion chambers.
16. The process of claim 13 wherein the vaporizable hydrocarbon and steam flow axially through said reforming catalyst bed.
17. The process of claim 13 wherein the vaporizable hydrocarbon and steam flow radially through said reforming catalyst bed.
- 20 18. The process of claim 13 wherein a sweep gas is used to promote the diffusion of hydrogen through said membrane tube, said sweep gas being selected from the group

consisting of steam, carbon dioxide, nitrogen and condensable hydrocarbon.

19. The process of claim 13 wherein the vaporizable hydrocarbon is selected from the group consisting of natural gas, methane, methanol, ethane, ethanol, propane, butane, light hydrocarbons having 1-4 carbon atoms in each molecule, light petroleum fractions including naphtha, diesel, kerosene, jet fuel or gas oil, and hydrogen, carbon monoxide and mixtures thereof.
20. The process of claim 13 wherein the ratio of the surface area of said flameless distributed combustion chambers to the surface area of said membrane tubes is from about 0.1 to about 20.0.
21. The process of claim 15 wherein the ratio of the surface area of said flameless distributed combustion chambers to the surface area of said membrane tubes is from about 0.5 to about 5.0.
22. The process of claim 13 wherein the ratio of the surface area of said flameless distributed combustion chambers to the surface area of said membrane tubes is from about 1.0 to about 3.0.

TH2244 (US)
LPM/YGT:

5 FLAMELESS DISTRIBUTED COMBUSTION HEATED, MEMBRANE,
STEAM REFORMING REACTOR FOR PRODUCTION OF HIGH PURITY HY-
DROGEN

10 ABSTRACT OF THE DISCLOSURE

 The disclosed invention relates to a new and im-
proved process and apparatus for the production of high
purity hydrogen by steam reforming. The disclosed appa-
15 tus is an integrated flameless distributed combustion-
membrane steam reforming (FDC-MSR) reactor for steam re-
forming of a vaporizable hydrocarbon to produce H₂ and
CO₂, with minimal CO, and virtually no CO in the H₂
stream. The flameless distributed combustion drives the
20 steam reforming reaction which provides great improve-
ments in heat exchange efficiency and load following ca-
pabilities. The reactor may contain multiple flameless
distributed combustion chambers and multiple hydrogen-
selective, hydrogen permeable, membrane tubes. The feed
25 and reaction gases may flow through the reactor either
radially or axially. A further embodiment of the inven-
tion involves a zero emission hybrid power system
wherein the produced hydrogen is used to power a high-
pressure internally manifolded molten carbonate fuel
30 cell. In addition, the design of the FDC-SMR powered

fuel cell makes it possible to capture good concentrations of CO₂ for sequestration or use in other processes.

+


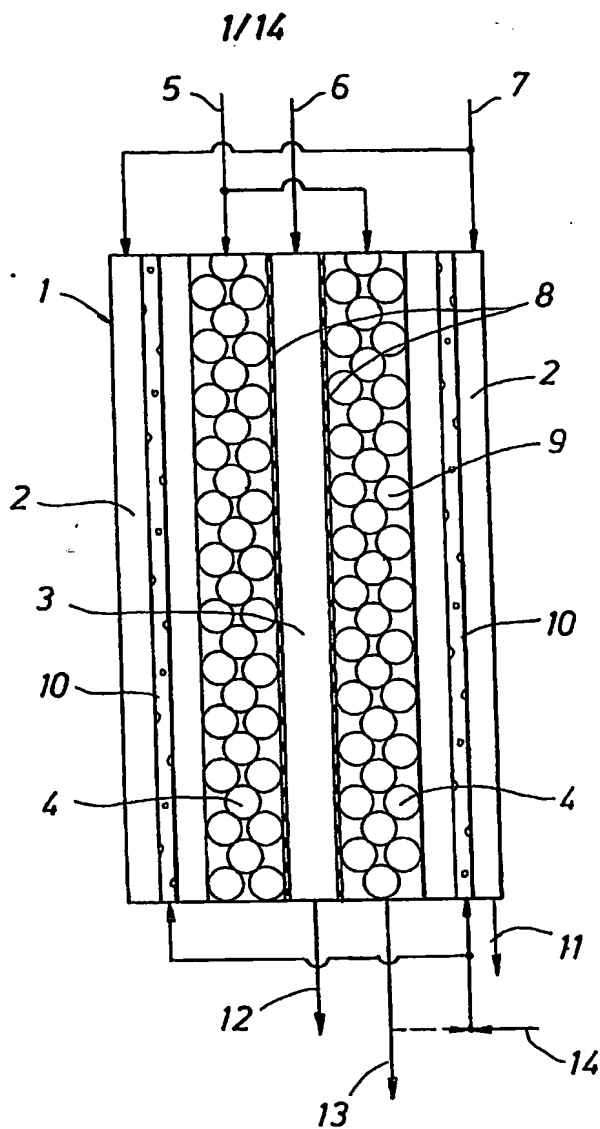


FIG. 1

FIG. 6

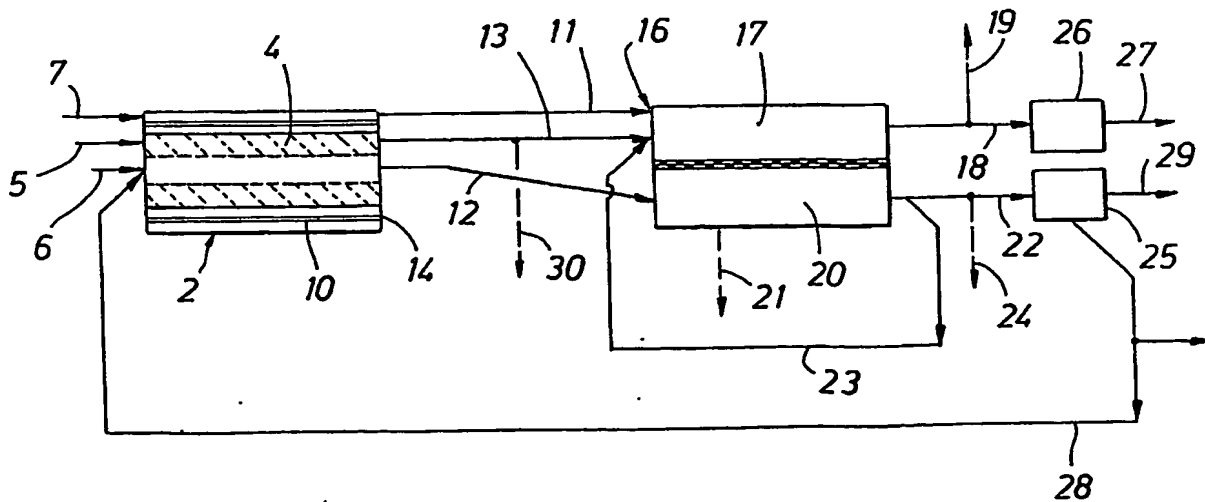

+


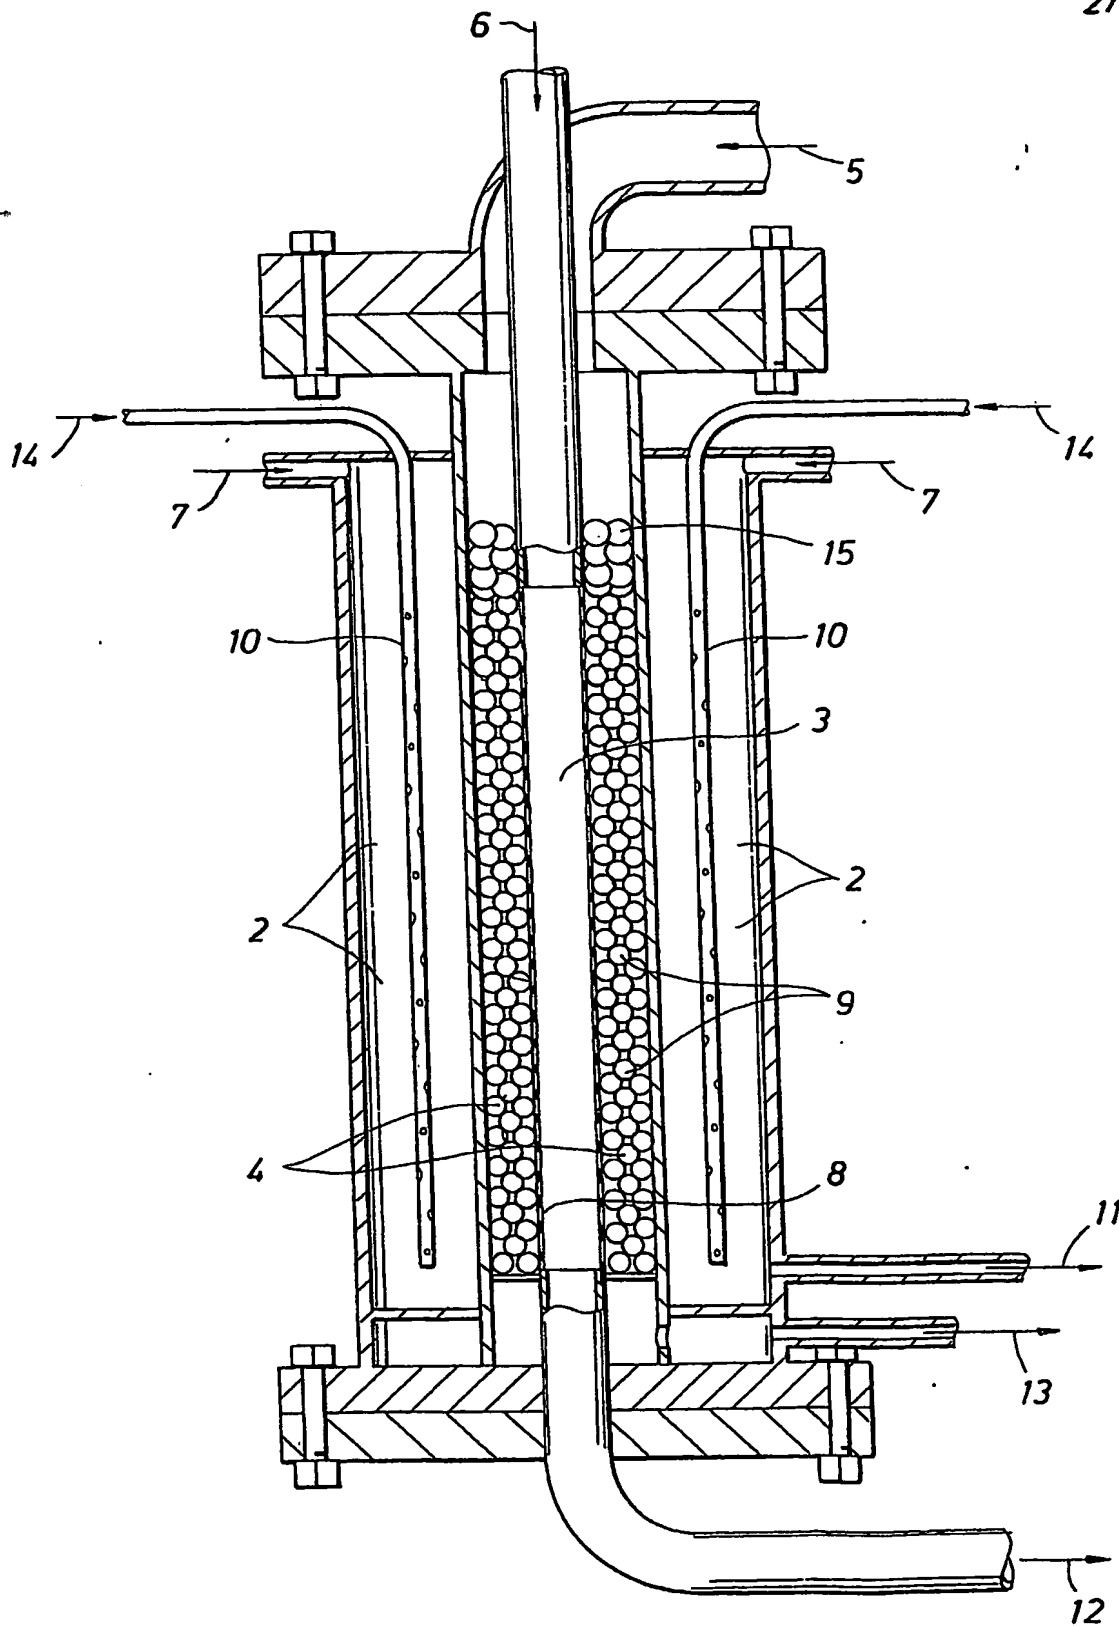


FIG. 2


3/14

FIG. 3

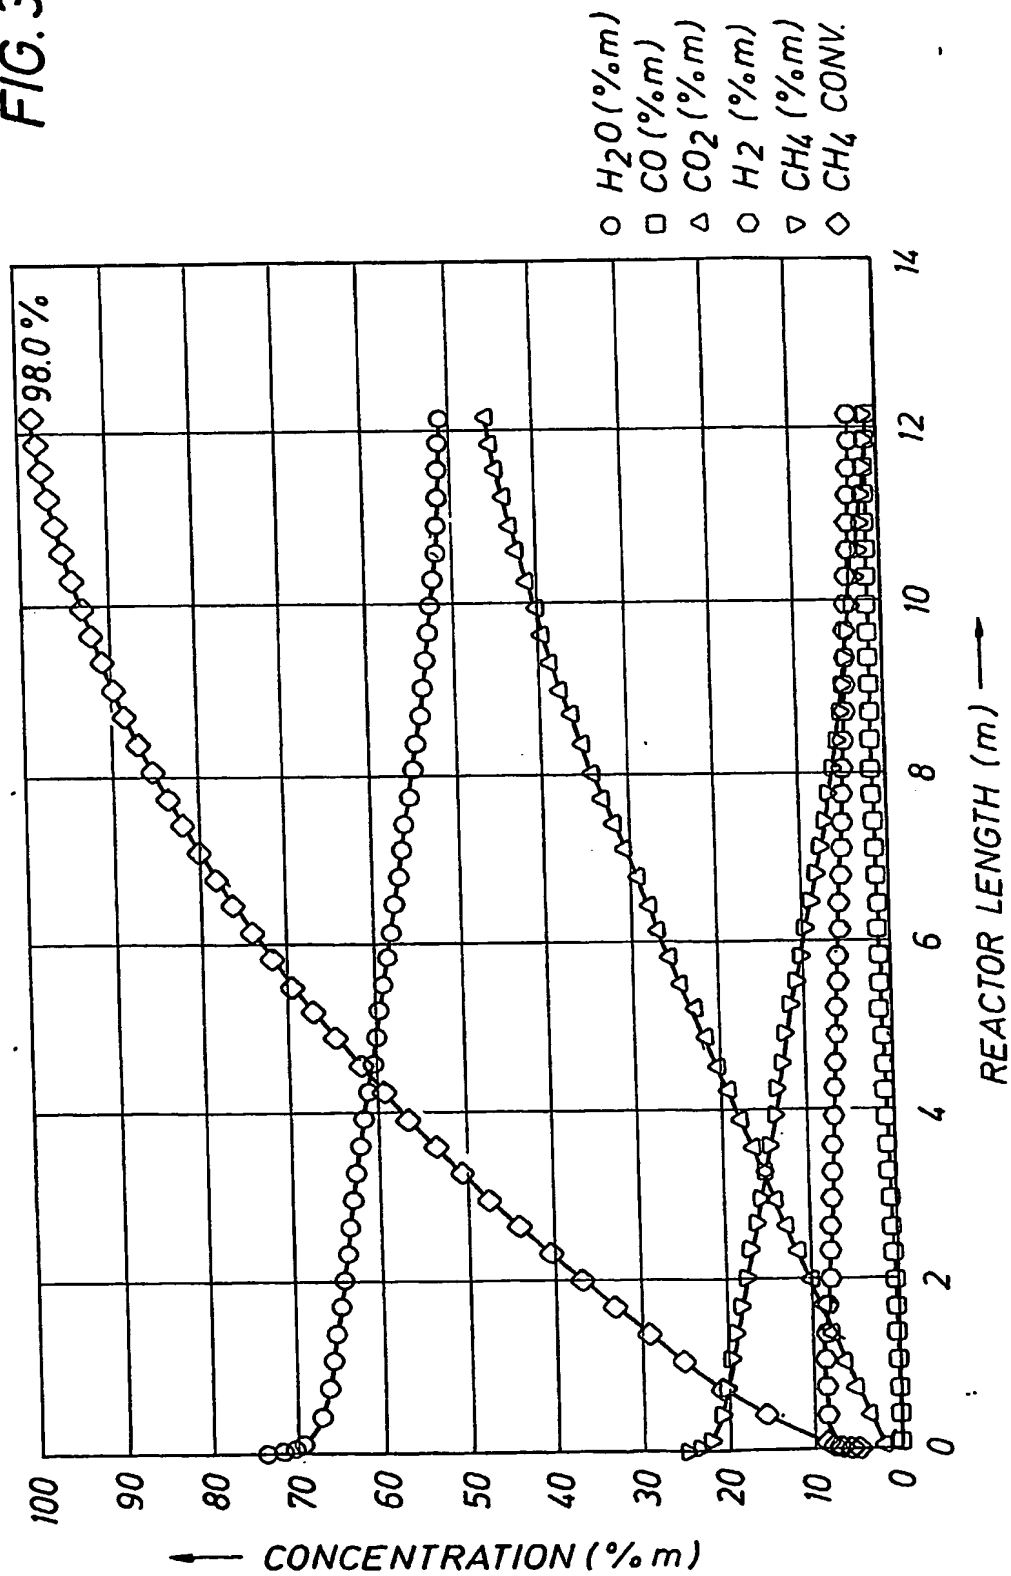

4/14

FIG. 4

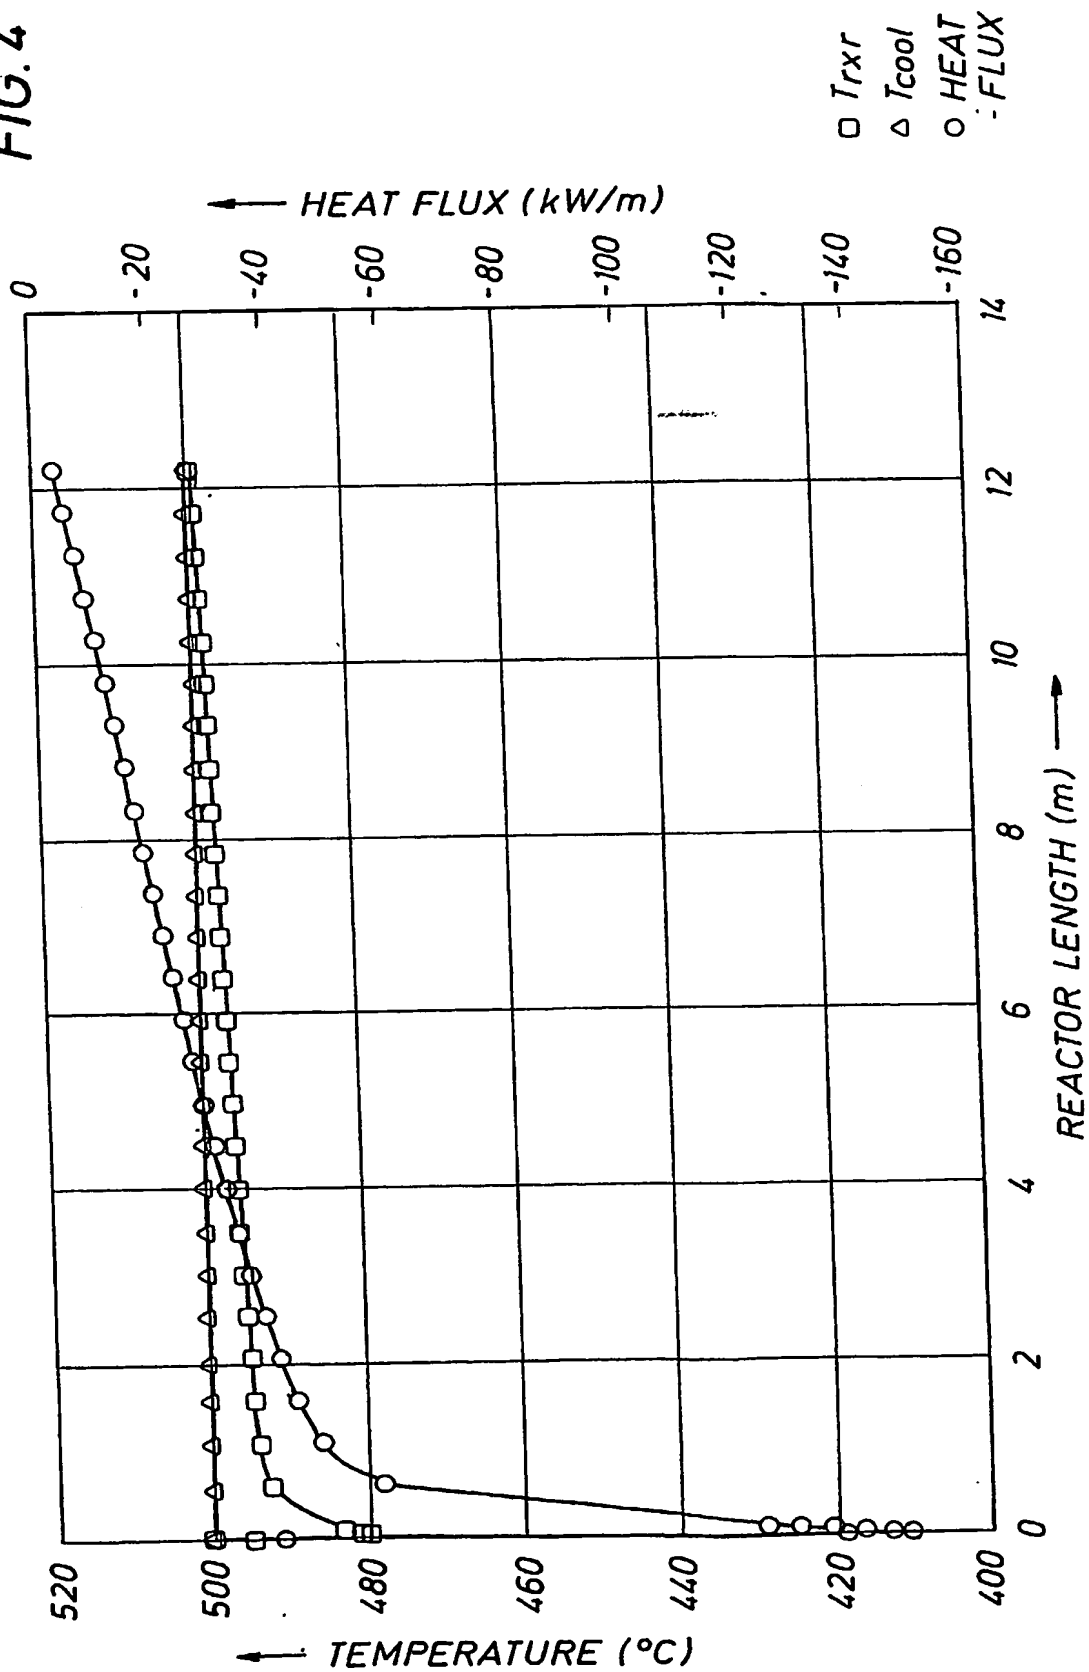

5/14

FIG. 5


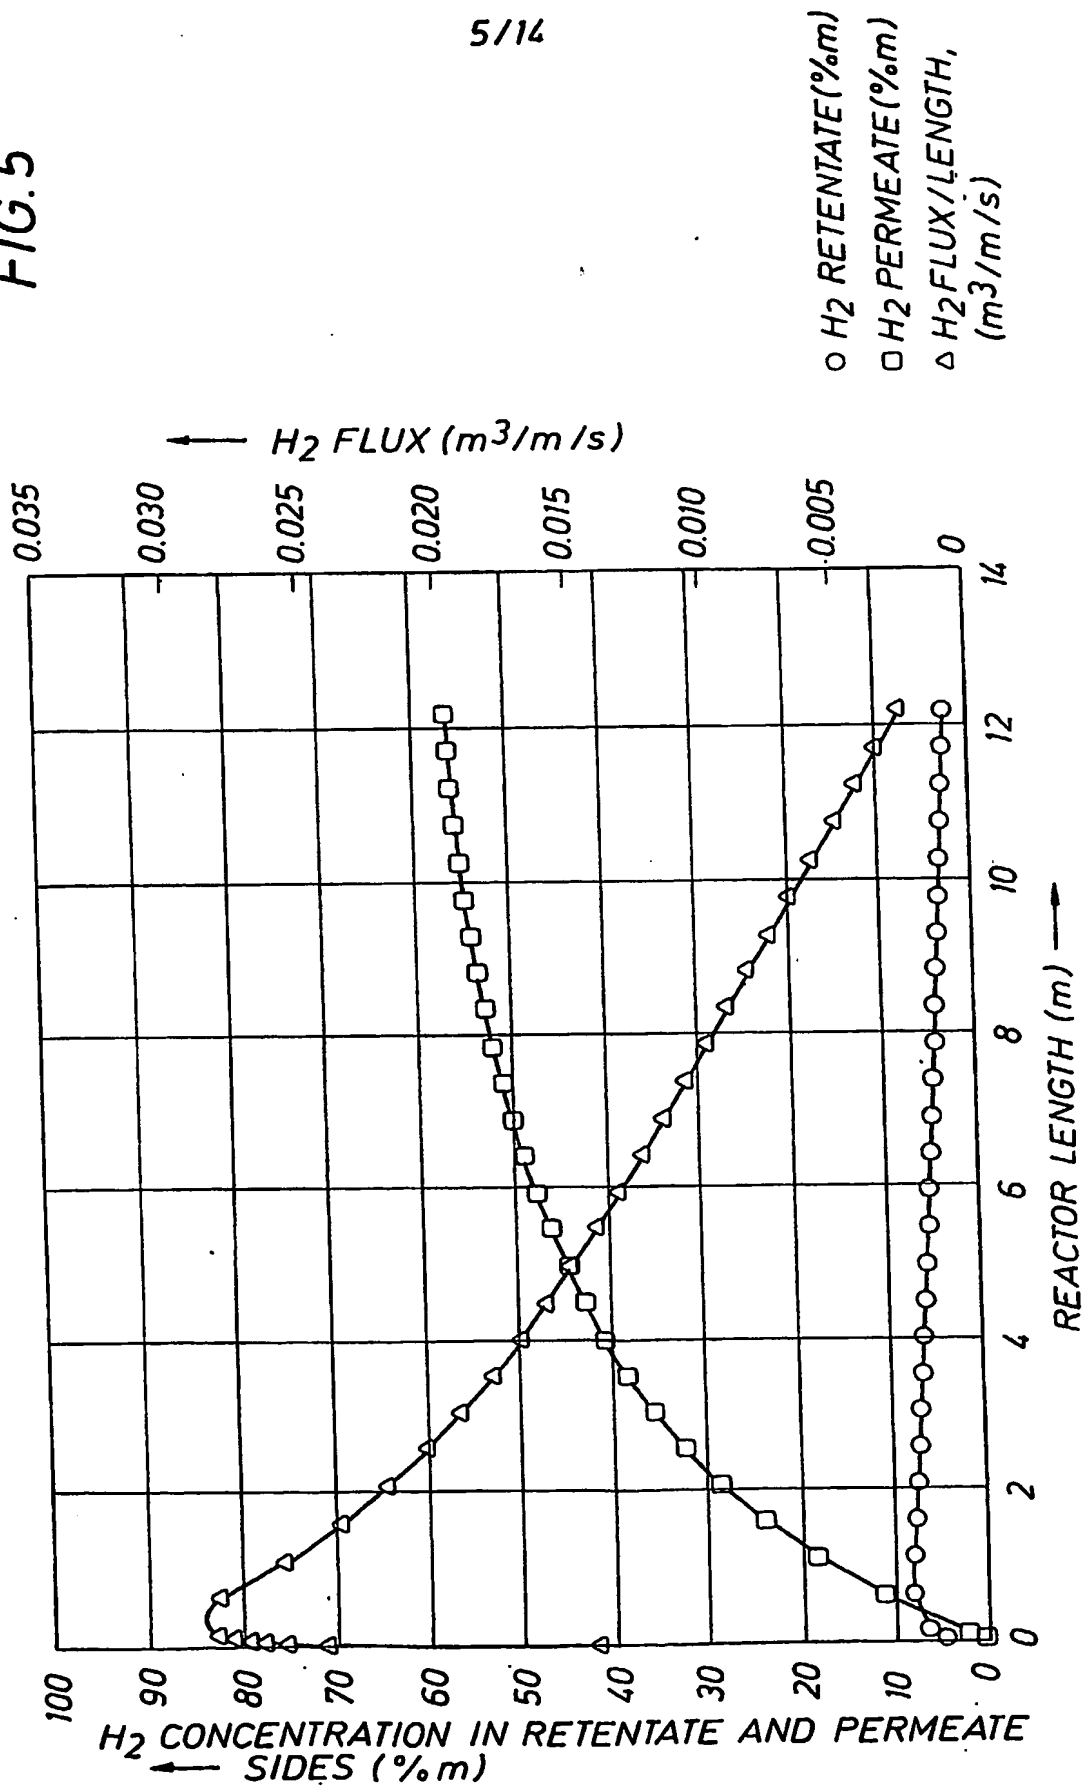


FIG. 7

FIG. 7A	FIG. 7B
---------	---------


6/14

FIG. 7A

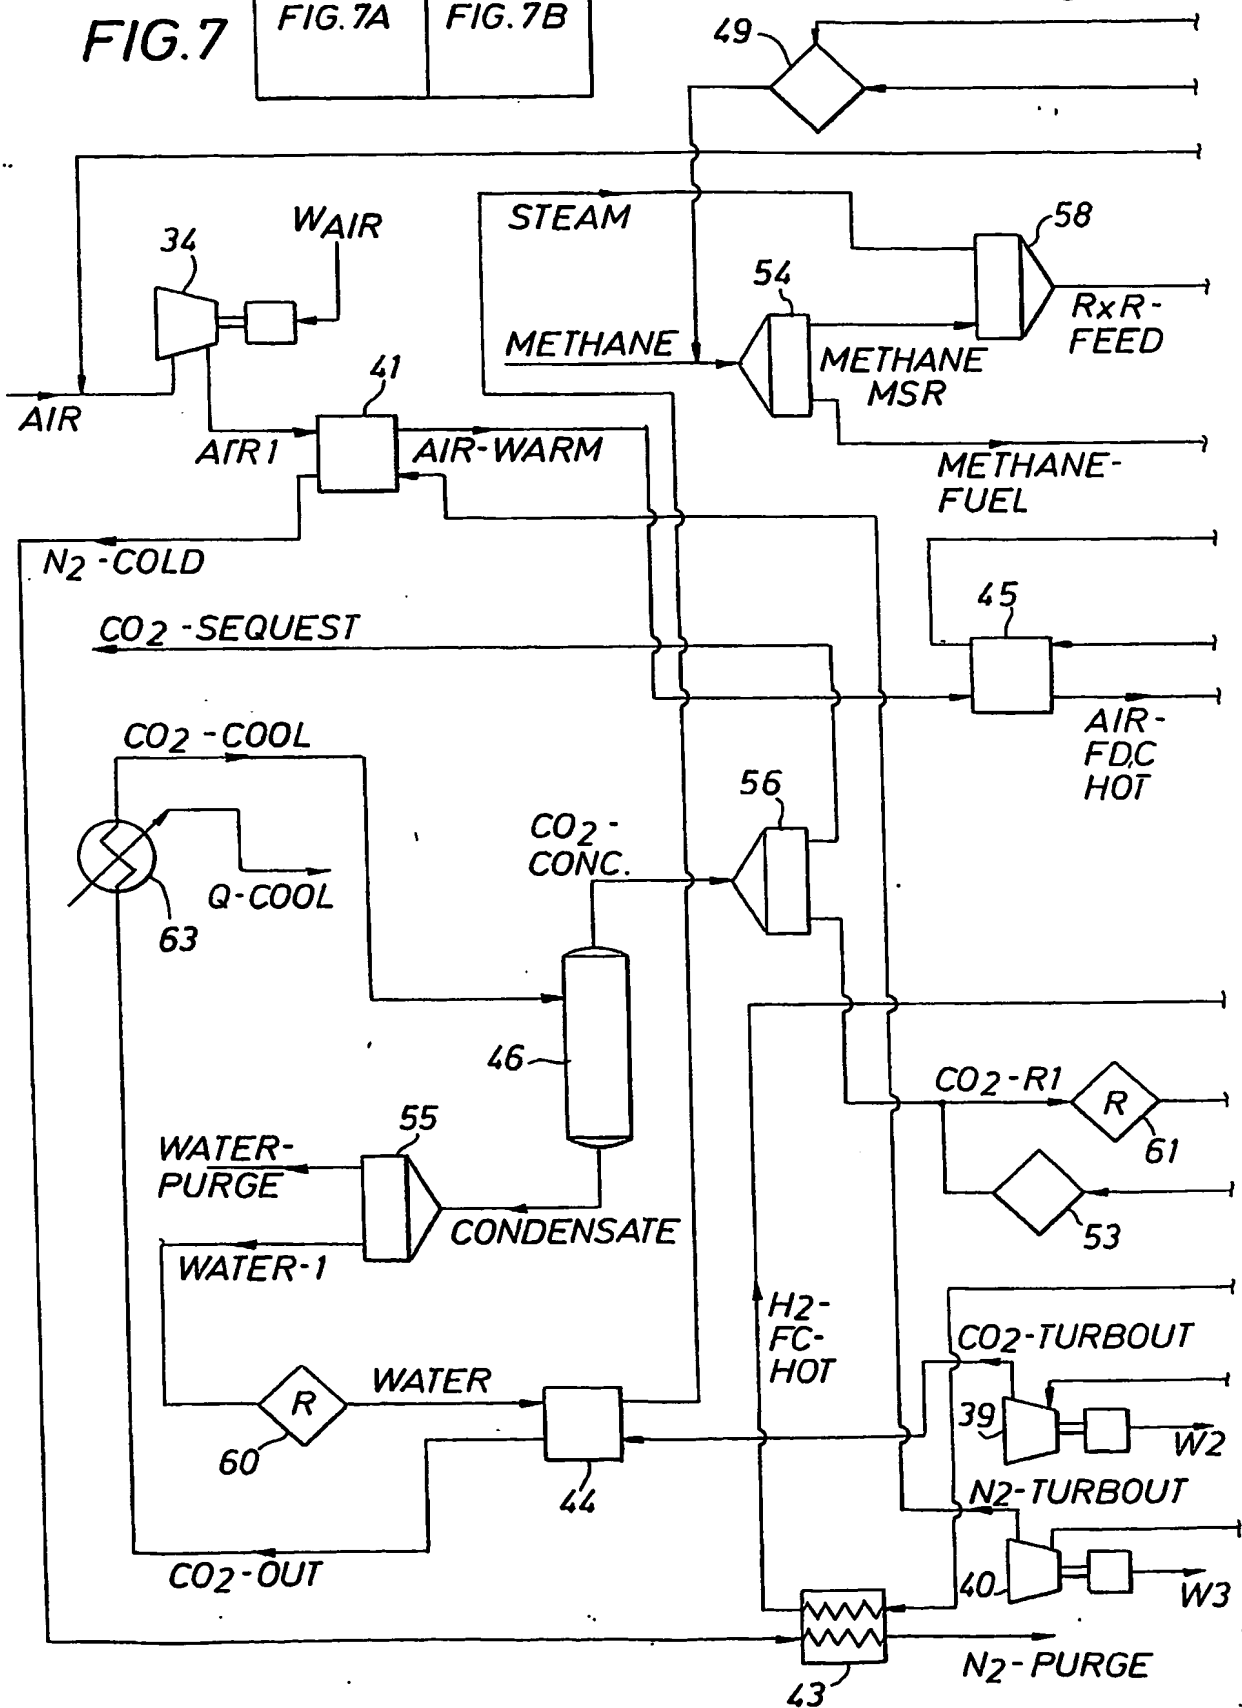

7/14

FIG. 7B

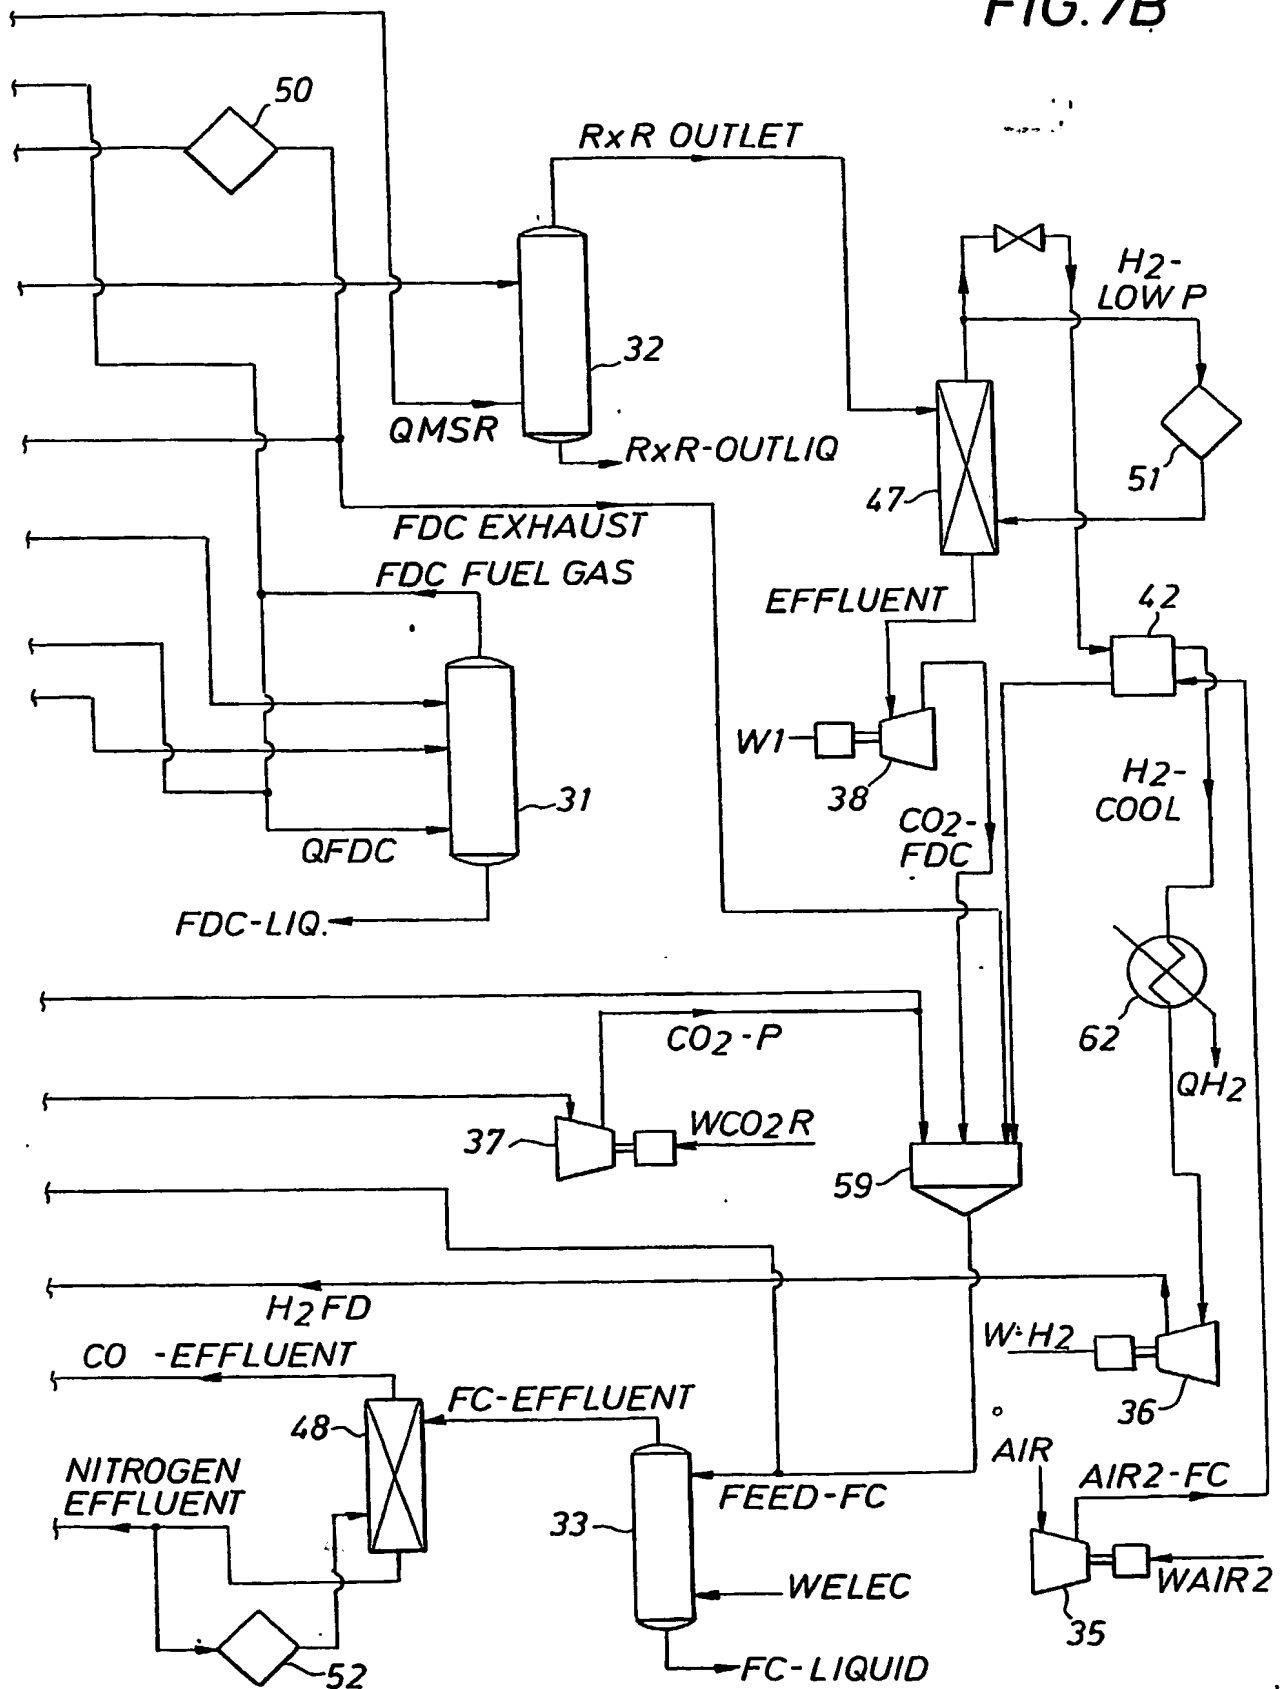

8/14

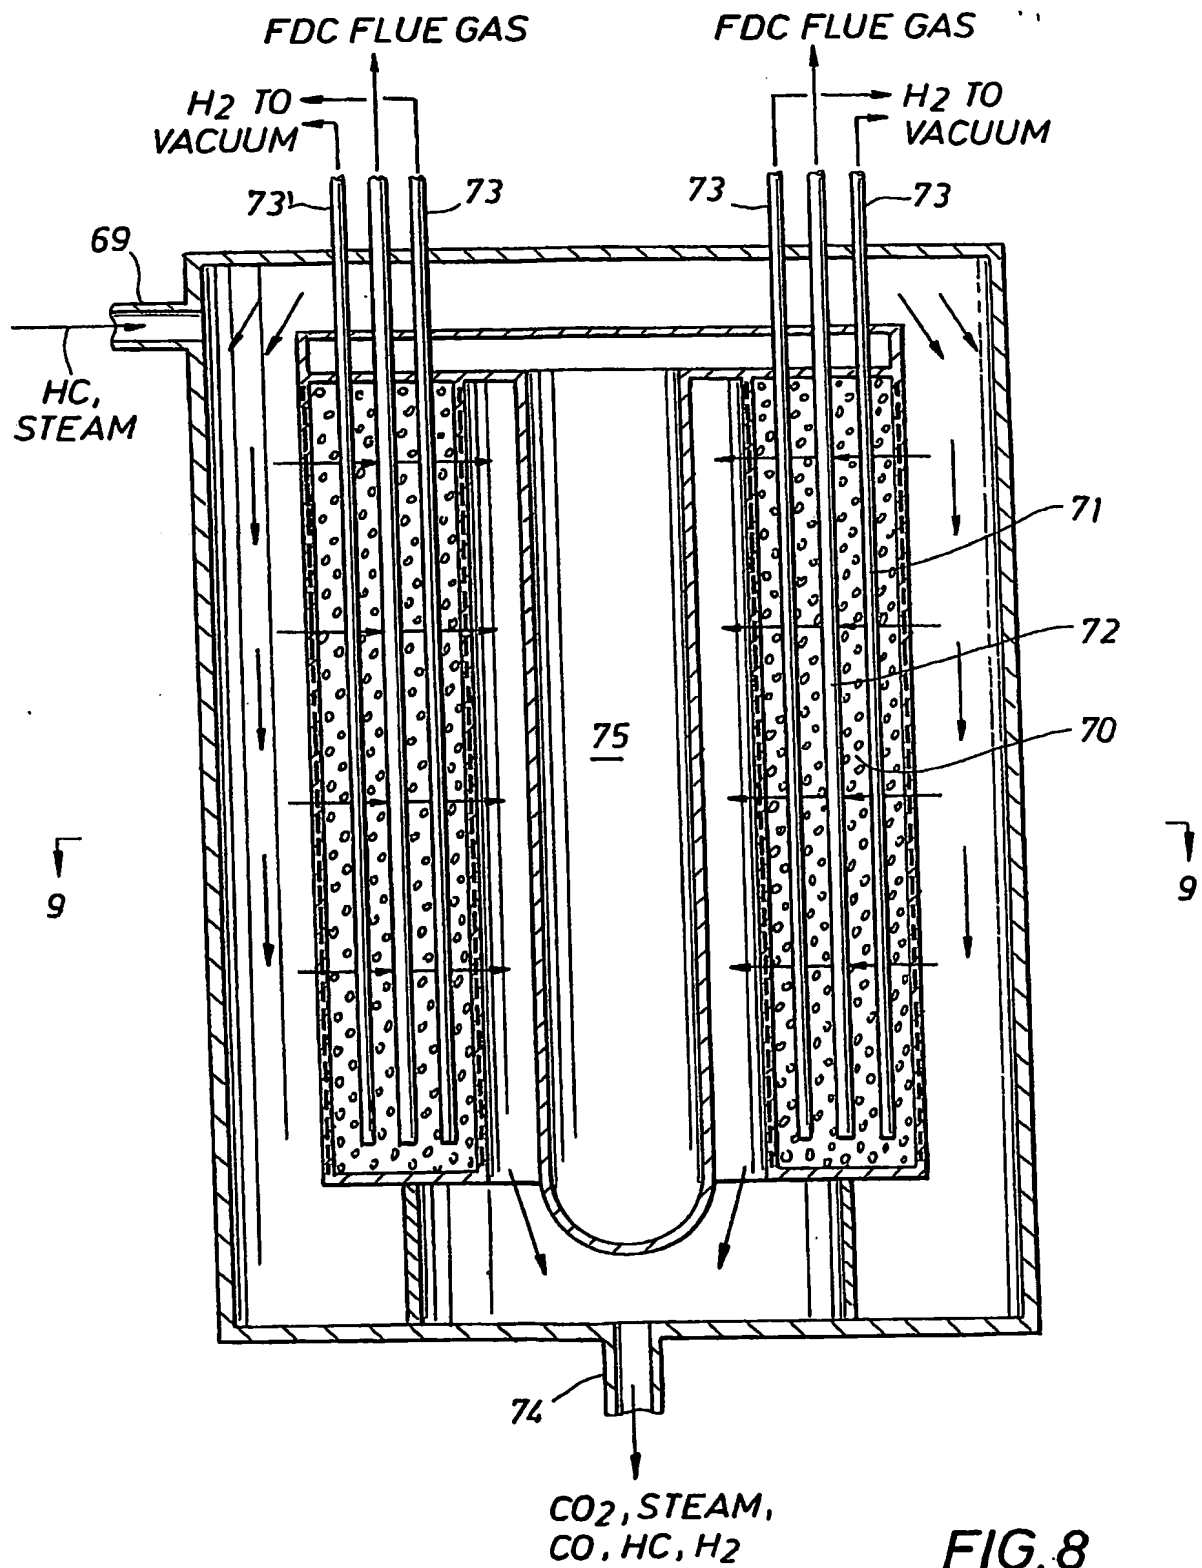


FIG. 8

9/14

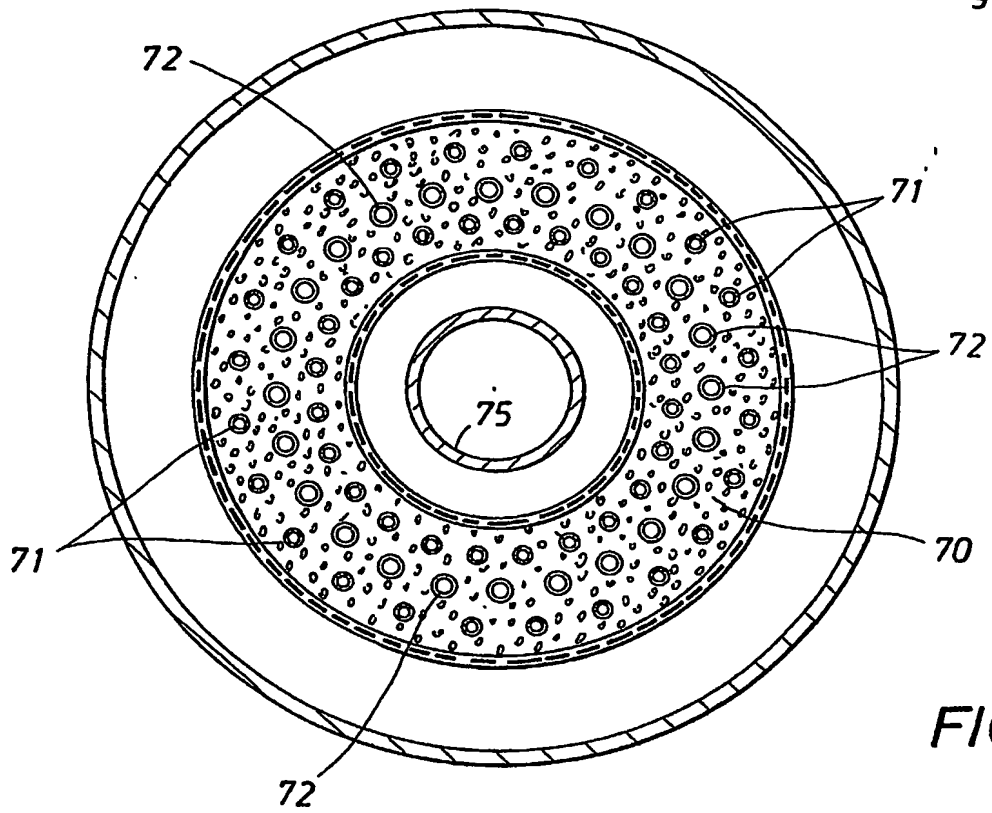


FIG. 9

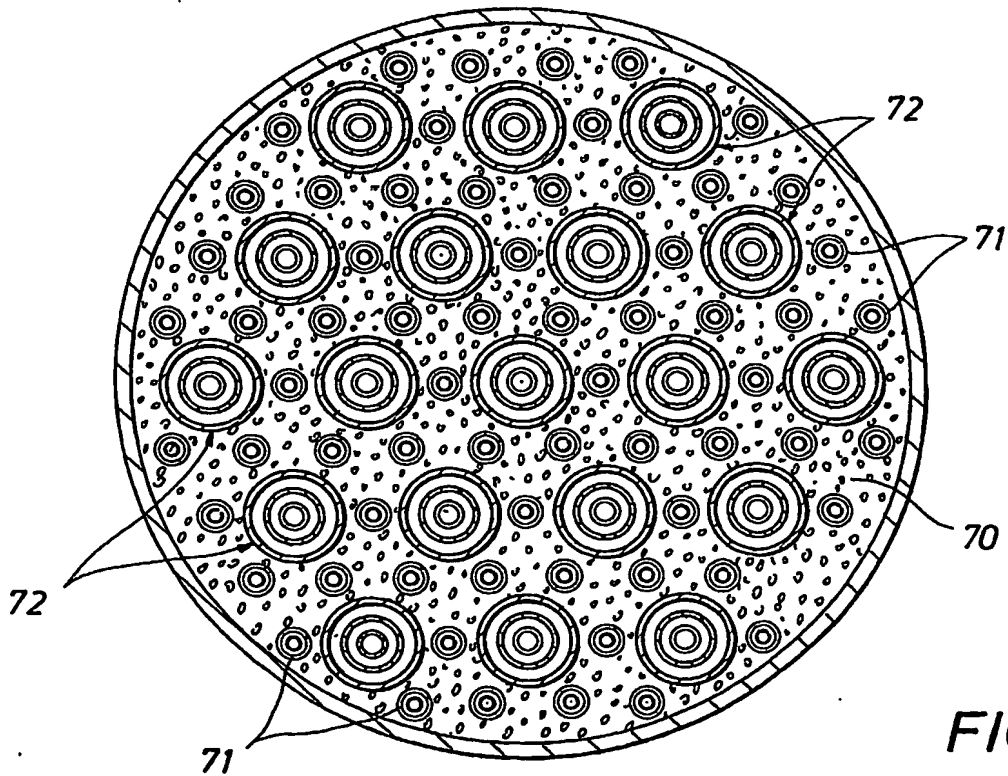


FIG. 12

10/14

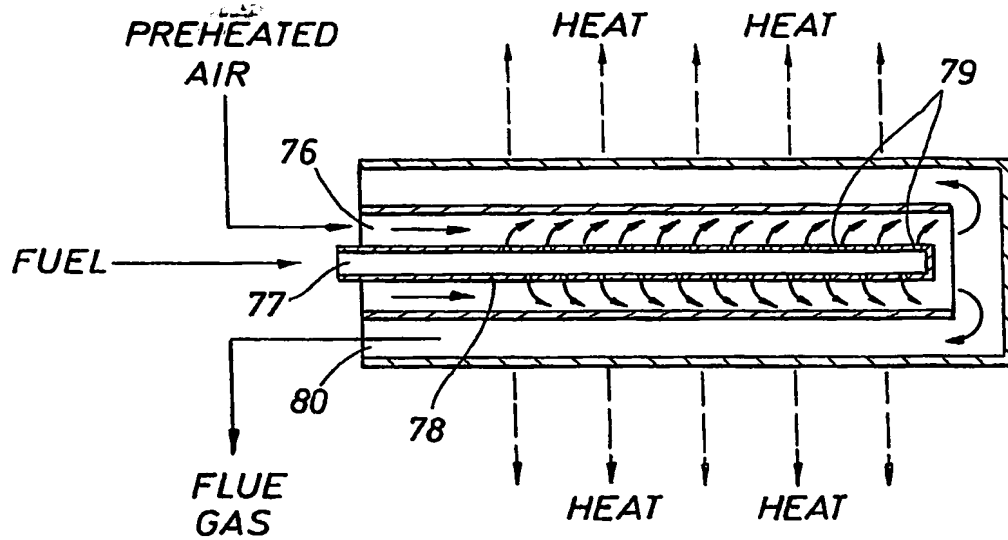


FIG. 10A


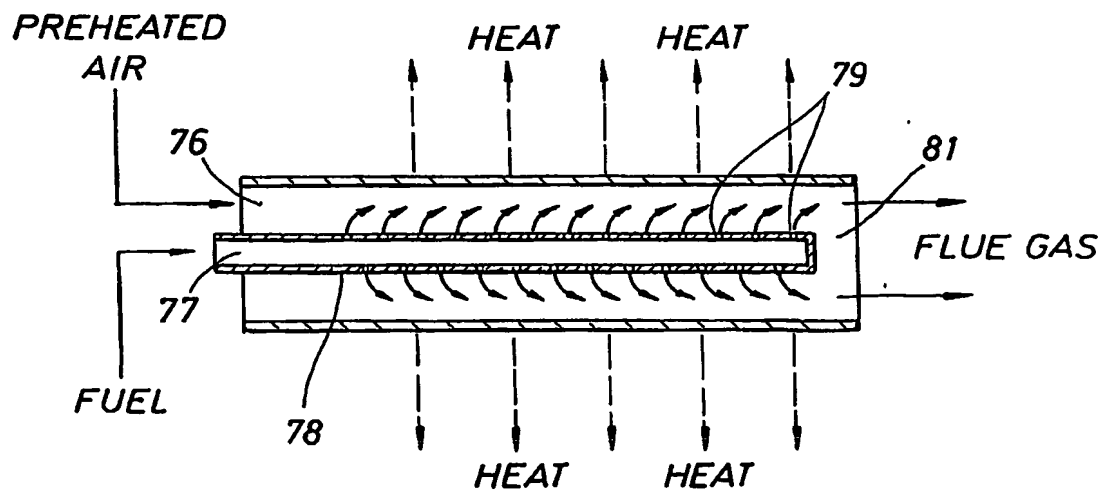


FIG. 10B

11/14

FIG. 11

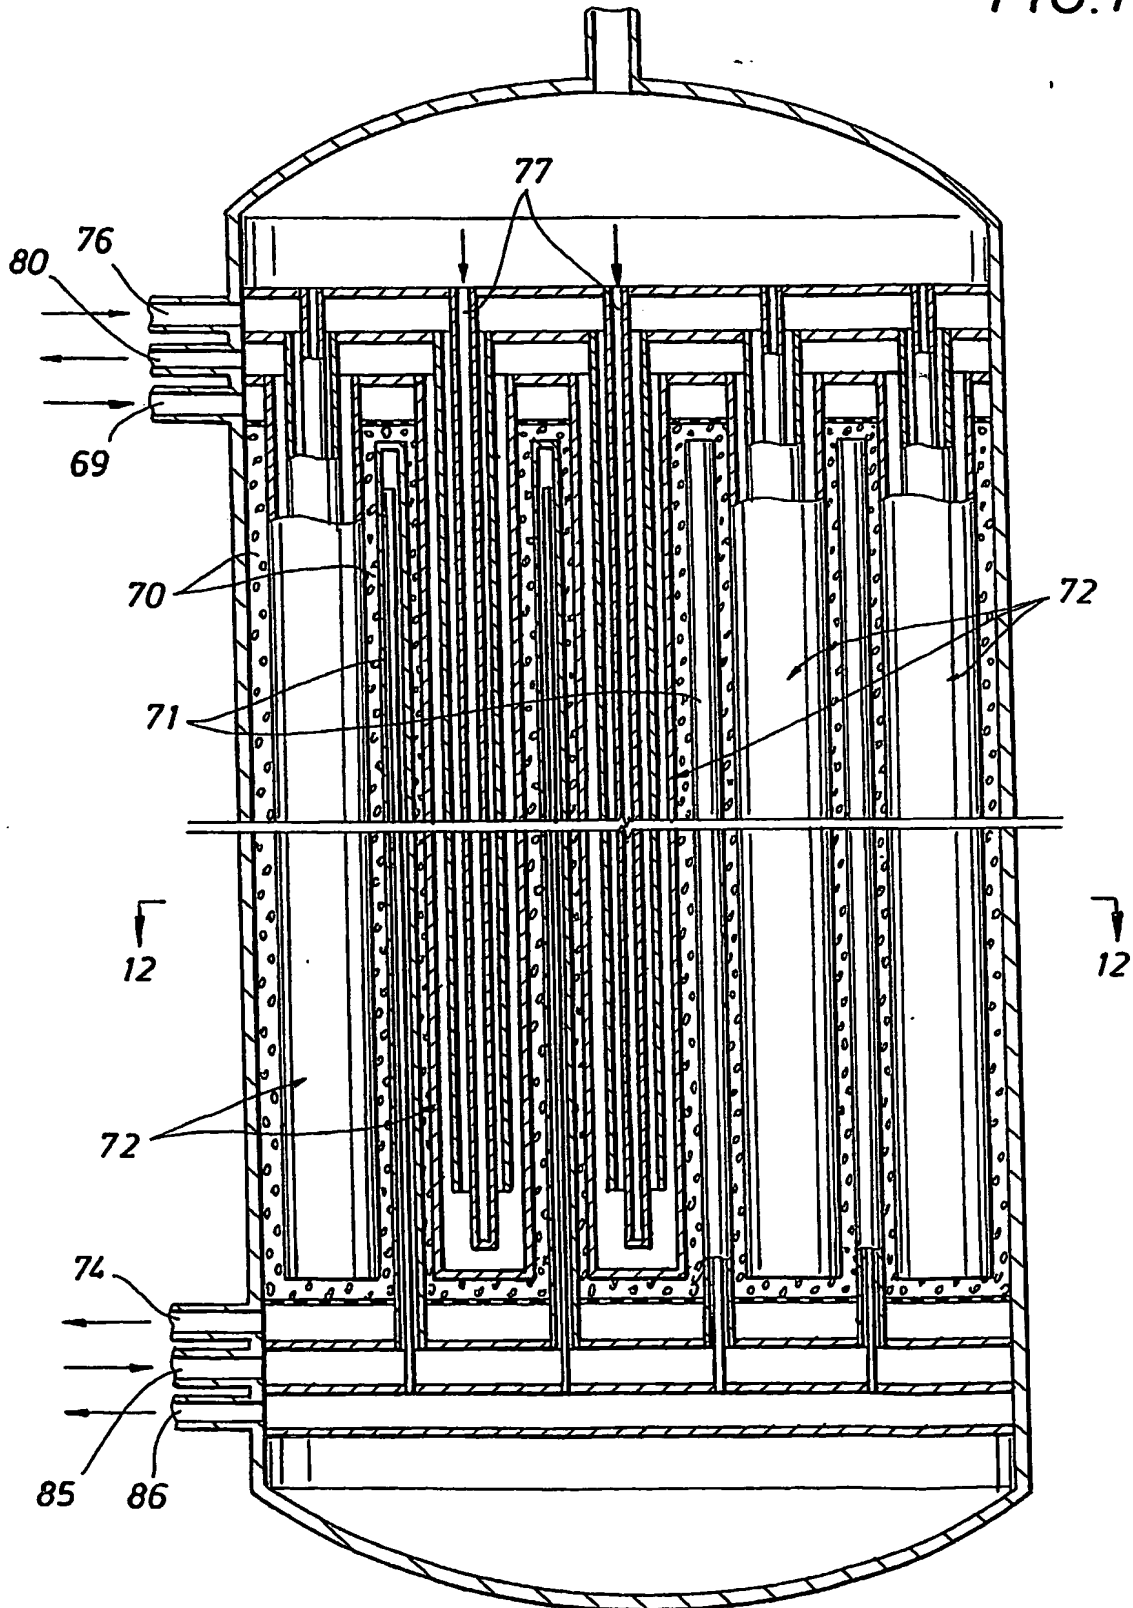

12/14

FIG.13A

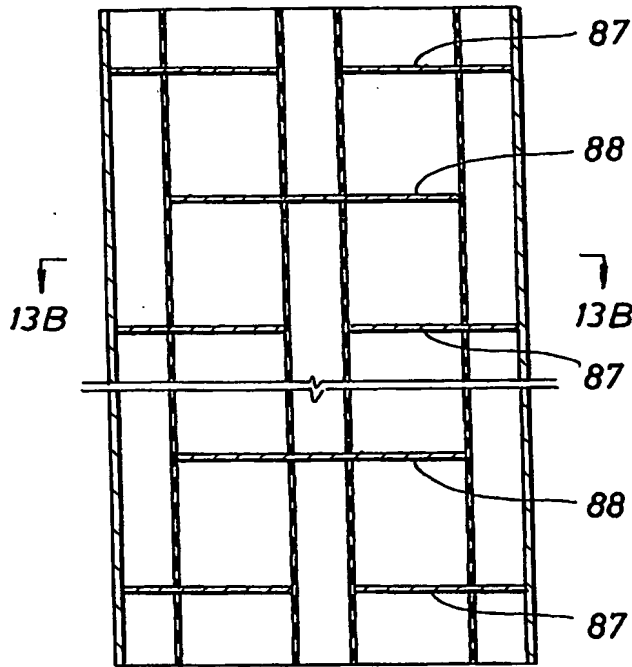


FIG.13B

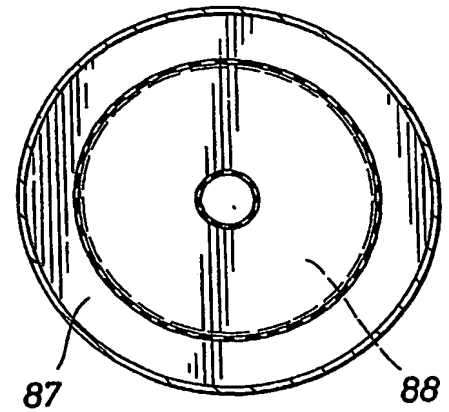


FIG.13C


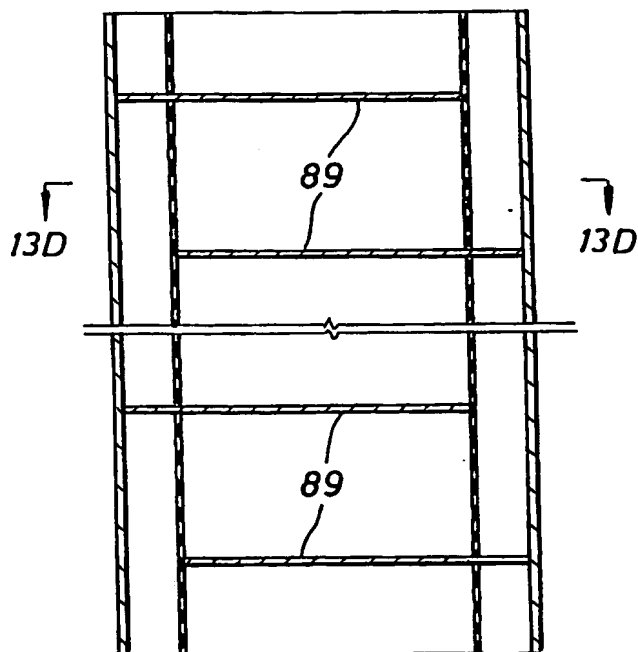


FIG.13D

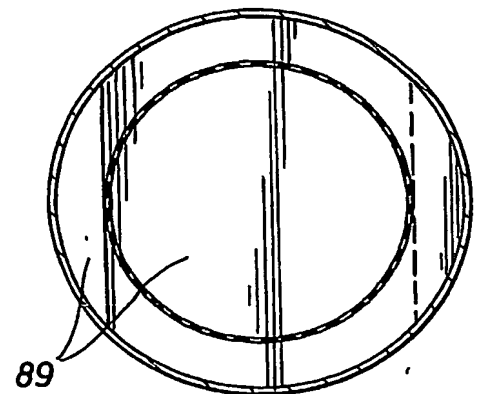

13/14

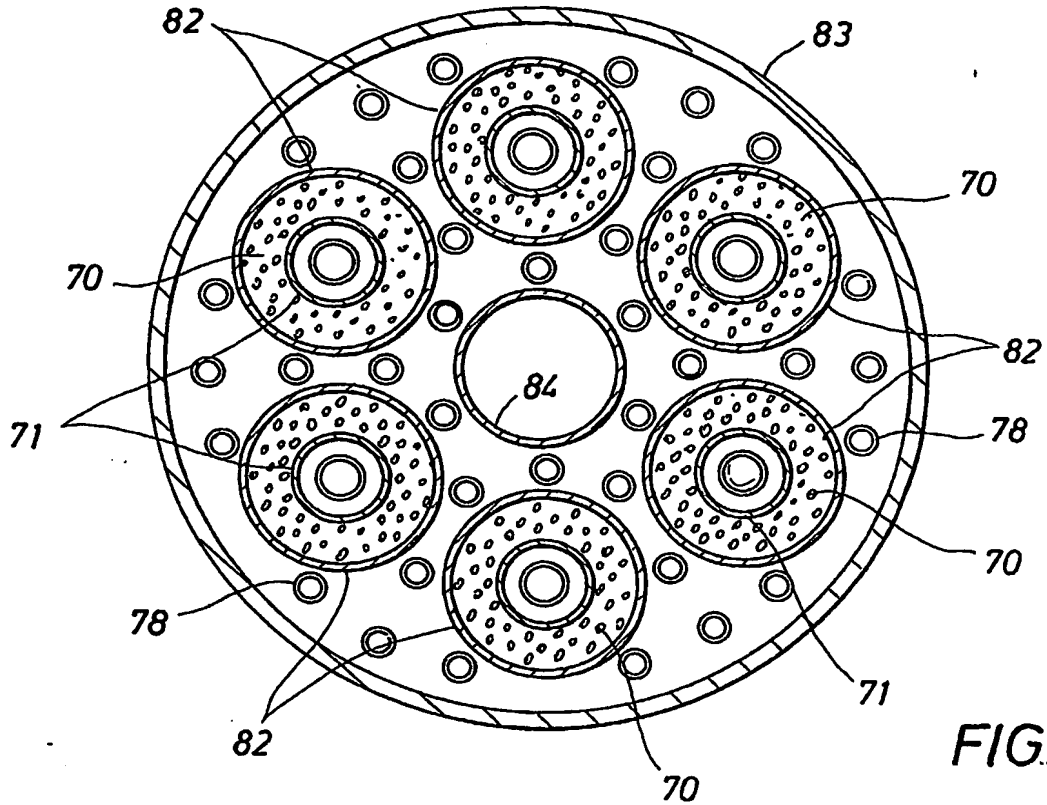


FIG. 15

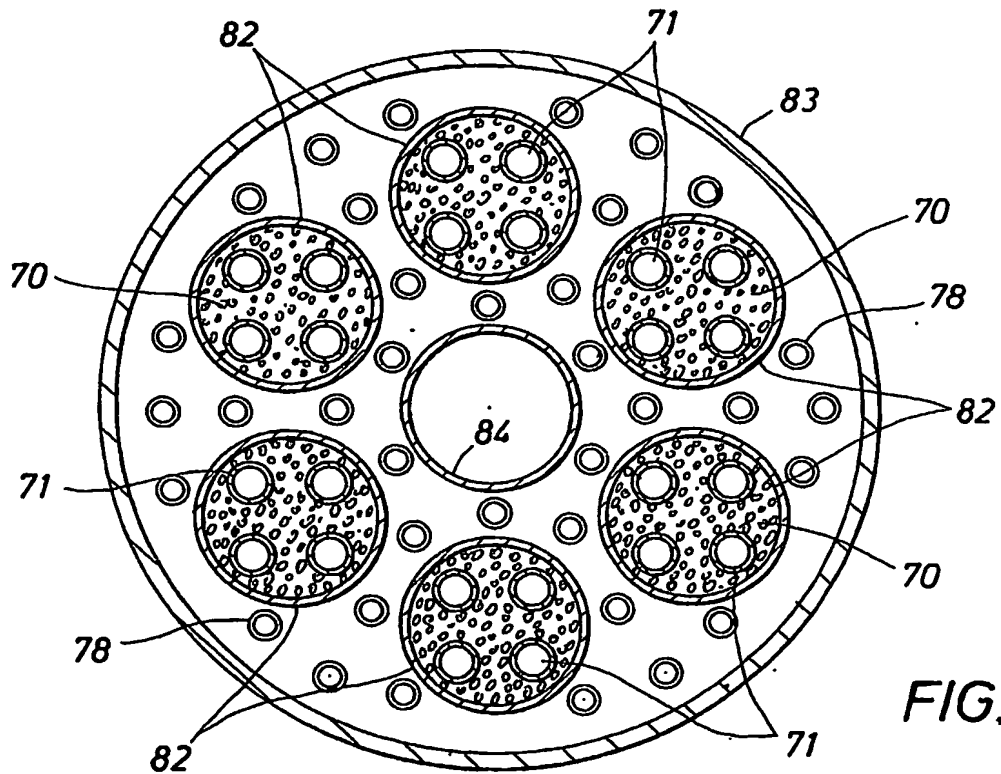


FIG. 16

14/14

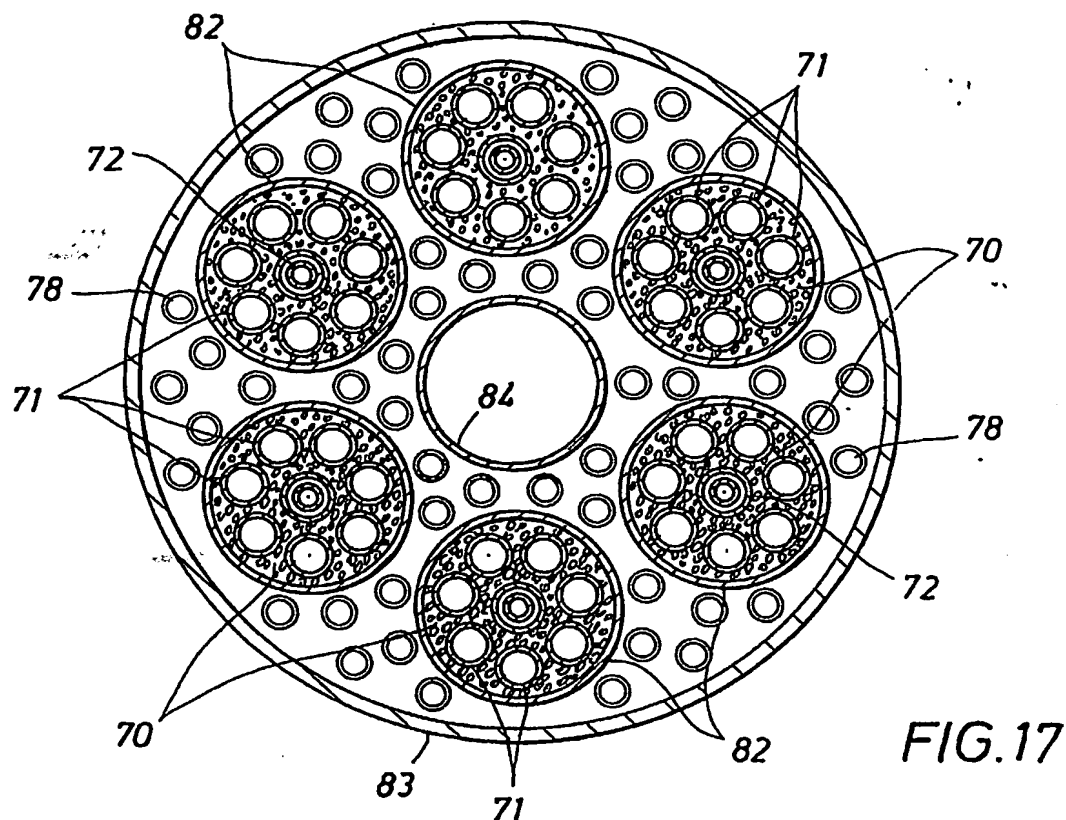


FIG. 17

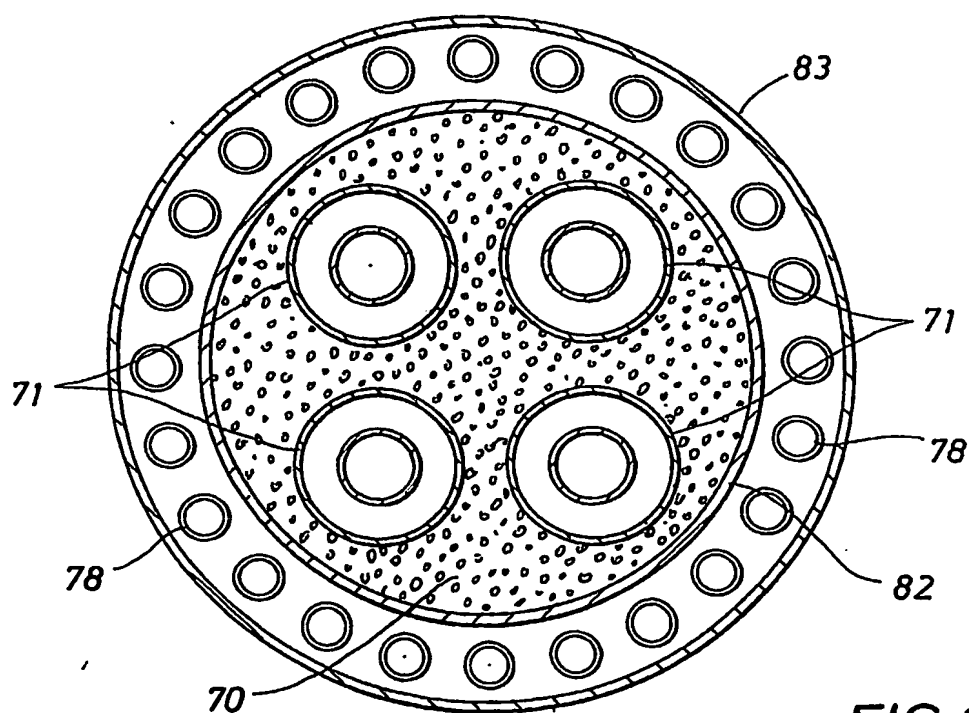


FIG. 14